

W-Band VNA Frequency Extender

75-110GHz/WR-10

Model: TLTE-075110-10/TLRE-075110

TLTE-075110-10/TLRE-075110 frequency extenders are a dedicated Test & Measurement solution for extending the range of your Vector Network Analyzer (VNA) to 75-110 GHz.

Features:

- Frequency range: 75-110GHz
- Port Output Power: 10dBm Typ
- Dynamic Range @ 10Hz BW: 130dB Typ
- Unconditional stability

Applications:

- VNA Frequency Extension
- Antenna measurements
- Material characterisation

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	75		110	GHz
Test Port Output Power		10		dBm
Dynamic Range @10Hz BW	110	130		dB
RF Input Frequency	12.5		18.33	GHz
RF Input Power	3	5	7	dBm
RF Multiplication Factor	6			
LO Input Frequency	12.5		18.33	GHz
LO Input Power	3	5	7	dBm
LO Multiplication Factor	6			
Conversion Loss of Receiver		10		dB
IF Frequency Range	1		1000	MHz
Amplitude Stability @300Hz BW		±0.1		dB
Phase Stability @300Hz BW		±2		°


Mechanical Specifications:

Parameter	Value
RF/LO Input Connector	SMA Female
MEA/REF IF Output Connector	SMA Female
Test Port Connector	WR-10/UG-387/U
Power Supply Pin	FGG 0B 4 Core

Absolute Maximum Ratings :

Description	Parameter	Units
RF/LO Port Damage Level (Transmit Extender)	+10	dBm
RF Port Damage Level (Receiver Extender)	0	dBm
LO Port Damage Level (Receiver Extender)	+10	dBm
Supply Bias Voltage	+240 V AC	
ESD sensitivity (HBm)	Class 0, passed 150V	

Block Diagrams:

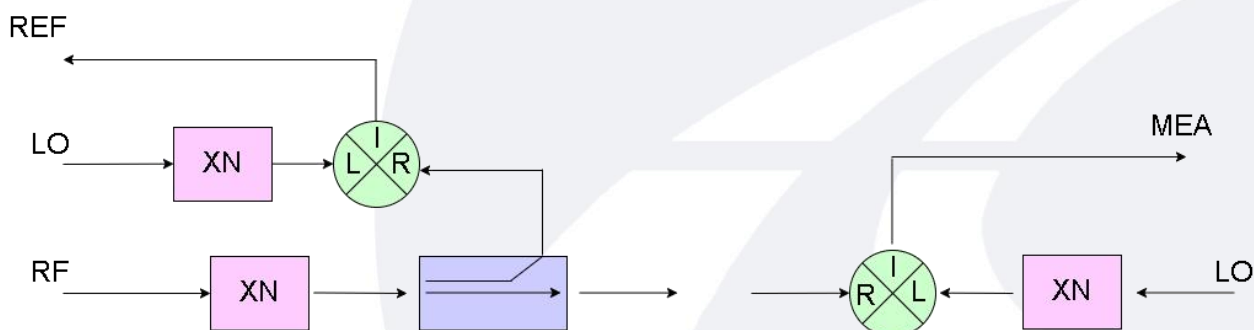

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	0 to +45	°C
Storage Temerature	-55 to +125	°C
Material	Aluminum	
Finish	Gray spray paint	

Ordering Information:

Part Number	Description	Revision
TLTE-075110-10	W-band VNA Frequency Extender, 75-110GHz, Output Power: 10dBm typ., Dynamic Range: 130dB typ, Magnitude Stability @300Hz BW: ± 0.1 dB, Phase Stability @300Hz BW: $\pm 2^\circ$	Rev.1.1
TLRE-075110	W-band Receiver Module, 75-110GHz, Conversion Loss: 10dB typ.	Rev.1.1

Components Included:

Part Number	Description	Quantity
S1-SMAMSMAM-1.2m	COAXIAL CABLE ASSEMBLY	4 PCS
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS

Notes:

1. Dimensions and specifications may be changed without prior notice.
2. Standard Warranty: three years.