

Low Noise Amplifier

0.01-0.1GHz/1.5dB NF/32dB Gain/20dBm P1dB

Model: TLLA0.01G0.1G-32-15

TLLA0.01G0.1G-32-15 is a low noise amplifier with a typical small signal gain of 32 dB and a nominal noise figure of 1.5dB across the frequency range of 0.01 to 0.1 GHz. The DC power requirement for the amplifier is +6 V DC/162 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 0.01-0.1GHz
- Gain: 32dB Typ
- Noise Figure: 1.5dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	0.01		0.1	GHz
Small Signal Gain	30	32		dB
Gain Flatness		±1		dB
Noise Figure		1.5		dB
Output P1dB		20		dBm
Input VSWR		1.8		:1
Output VSWR		1.8		:1
DC Voltage	+5	+6	+8	V DC
DC Supply Current		162		mA
Impedance		50		Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	44.8*29.2*11	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+8 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

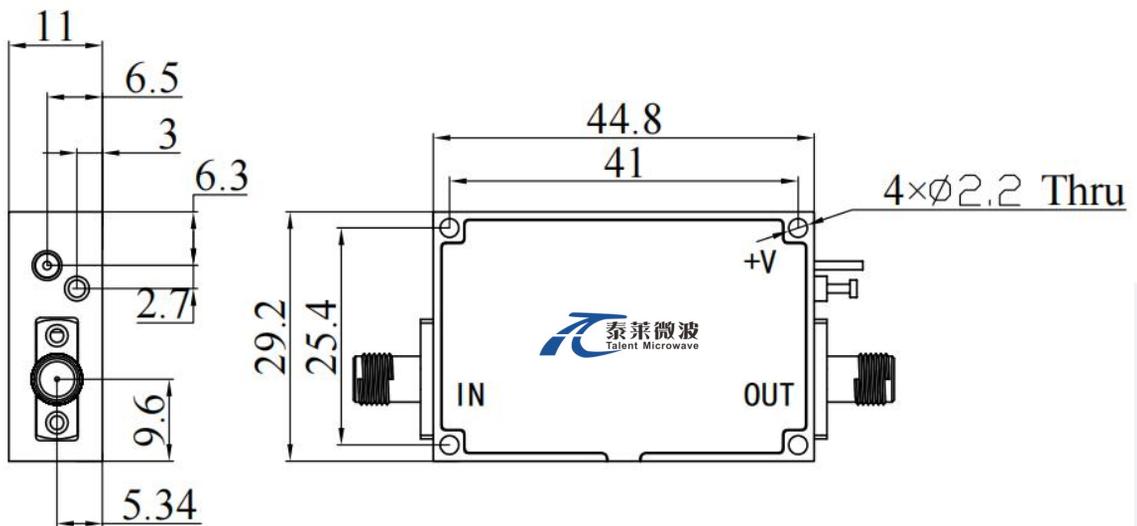

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:


Base Number	Description	Revision
TLLA0.01G0.1G-32-15	Low Noise Amplifier,0.01-0.1GHz, Noise Figure:1.5dB, Gain:32dB,P1dB:20dBm,+6V DC,Without Heatsink	Rev.1.1
TLLA0.01G0.1G-32-15-HS	Low Noise Amplifier, 0.01-0.1GHz, Noise Figure:1.5dB, Gain:32 dB,P1dB:20dBm,+6V DC,With Heatsink	Rev.1.1

Typical Performance Data:

Gain&VSWR vs Frequency




Noise Figure vs Frequency

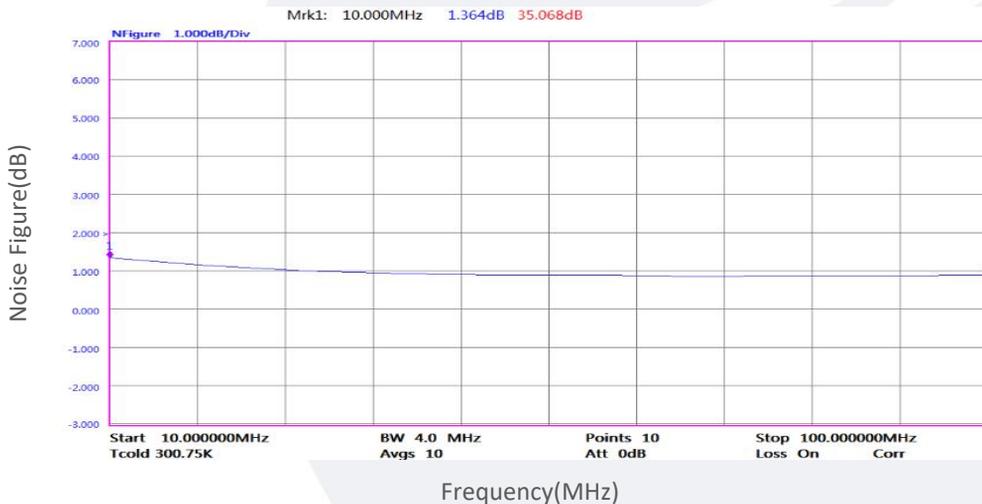

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

P1dB vs Frequency

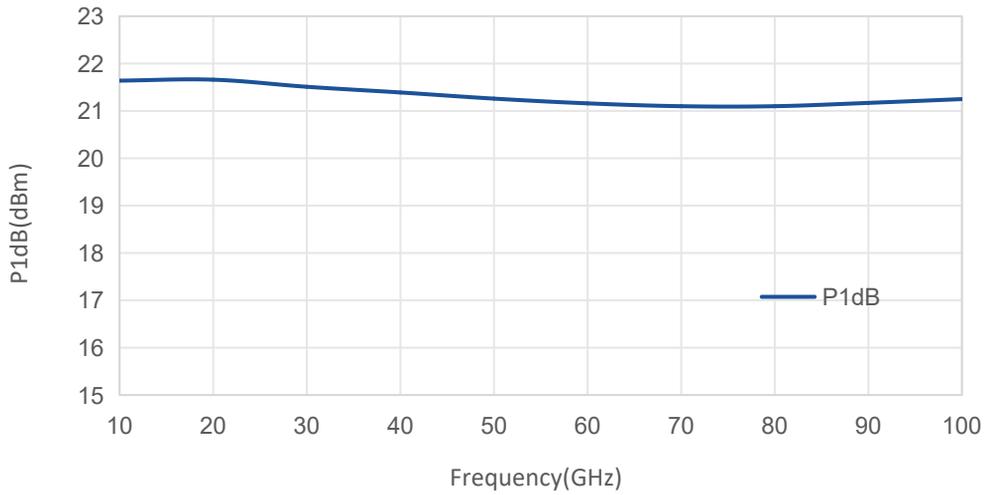

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.