

Model: TMLA-110130-1940-08
Low Noise Amplifier
110-130GHz, NF:4.0 dB, Gain:19dB
Feature:

- Ultra Wide Band: 110-130 GHz
- Gain: 19dB Typ
- Noise Figure:4.0dB Typ
- Unconditional stability

Electrical Specifications:

Parameter	Min	Typ	Max	Units
Frequency range	110		130	GHz
Gain	15	19		dB
Noise Figure		4		dB
Output P1dB		0		dBm
Input VSWR		3		:1
Output VSWR		2		:1
DC Voltage		+7		V DC
DC power supply		30		mA

Mechanical Specifications:

Parameter	Value	Units
Input Connector	WR-08/ UG-387/U	
Output Connector	WR-08/ UG-387/U	
Power Supply Pin	Solder Pin	
Size	/	mm


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+7 V
RF Input Power	TBD
ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
 Benchtop Amplifier**

Outline Drawing:

Unit: Inches(mm)

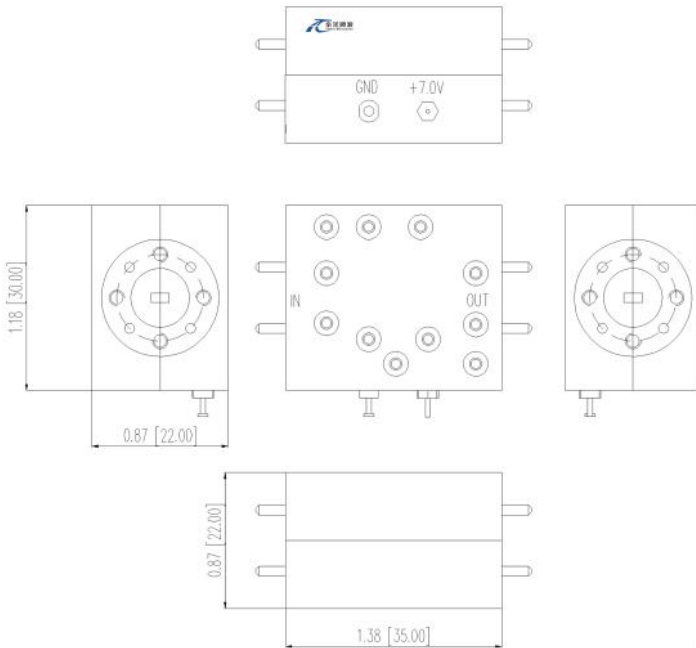

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-55		+85	°C
Non-operating Temperature	-45		+125	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TMLA-110130-1940-08	Low Noise Amplifier,110-130GHz, Noise Figure:4.0dB, Gain:19dB,+7V DC,WR-08	Rev.1.1