

Model: TMPA-092096-3030-10
Power Amplifier
92-96 GHz, Gain:30 dB,Psat:30 dBm
Feature:

- Frequency Range:92-96 GHz
- Gain:30 dB Min
- Output Power Psat:30 dBm Typ
- Good Power and Gain Flatness

Electrical Specifications:

Parameter	Min	Typ	Max	Units
Frequency range	92-96			GHz
Gain	30	32		dB
Output Psat	29	30	32	dBm
Input VSWR		2		:1
Output VSWR		2.5		:1
DC Voltage		19		V DC
DC Supply Current		1200		mA

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	WR-10/UG-387/U	
DC Bias	Solder Pin	
Size	/	mm
Weight	/	g


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	TBD
RF Input Power	TBD
ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
 Benchtop Amplifier**

Outline Drawing:

Unit: mm(Inches)

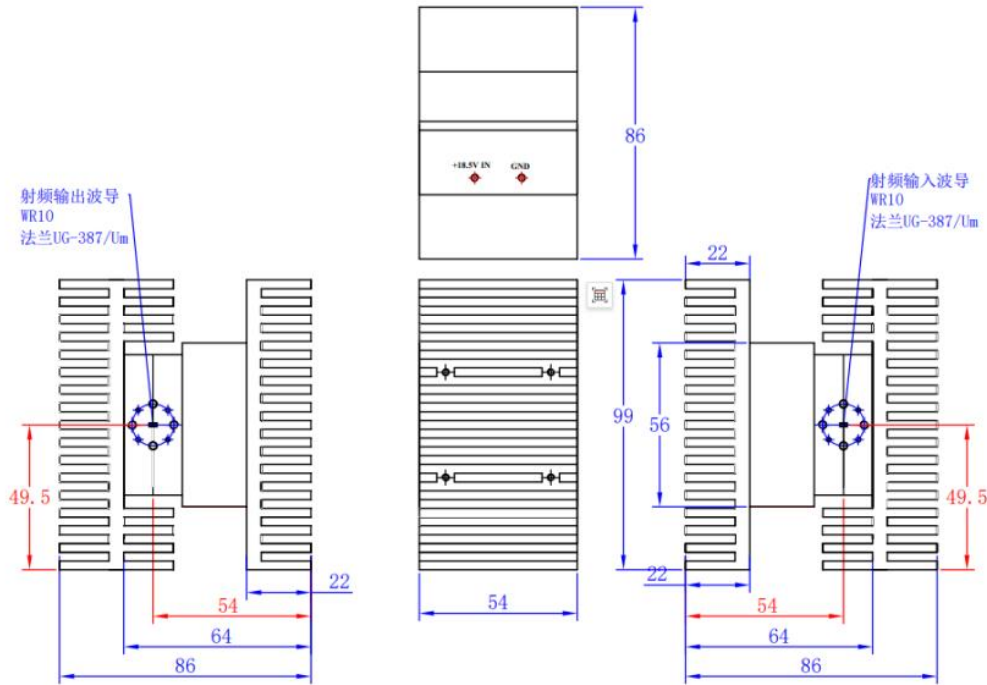

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+40	°C
Non-operating Temperature	-45		+125	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TMPA-092096-3030-10	Power Amplifier,92-96 GHz, Gain:30 dB Min,Psat:30 dBm Typ,19V DC,WR-10	Rev.1.1