

Model:TLPA40G60G-47-47-BC

Solid State High Power Amplifier Systems 40-60GHz,Gain:47dB,Psat:47dBm,220V AC

Feature:

- Wide Band: 40-60GHz
- Gain: 47dB Min
- Psat Output Power:47dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection.
- 50 Ohm Matched Input / Output



Electrical Specifications:

Parameter	Symbo	Min	Typ	Max	Units
Frequency range	BW	40-60			GHz
Gain	GP	47			dB
Gain flatness	Δ GL		\pm 5		dB
Output Psat	Psat	50			dBm
ALC Accuracy	ALC			\pm 0.5	dB
Spurious	Spur			-50	dBc
Input VSWR	VSWRin		2.5		:1
AC Voltage	Vac	220			V AC
Power Consumption	Pdiss	1500@Max			Watts
Input Impedance	I/O-IMP	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input/Output Connector	1.85 Female/WR19	
Communication Interfaces	RJ45/DB9	
Size	19 Inch 6U*550 depth	mm
Weight	45	Kg

Absolute Maximum Ratings:

Parameter	Value
RF Input Power	5dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit: mm

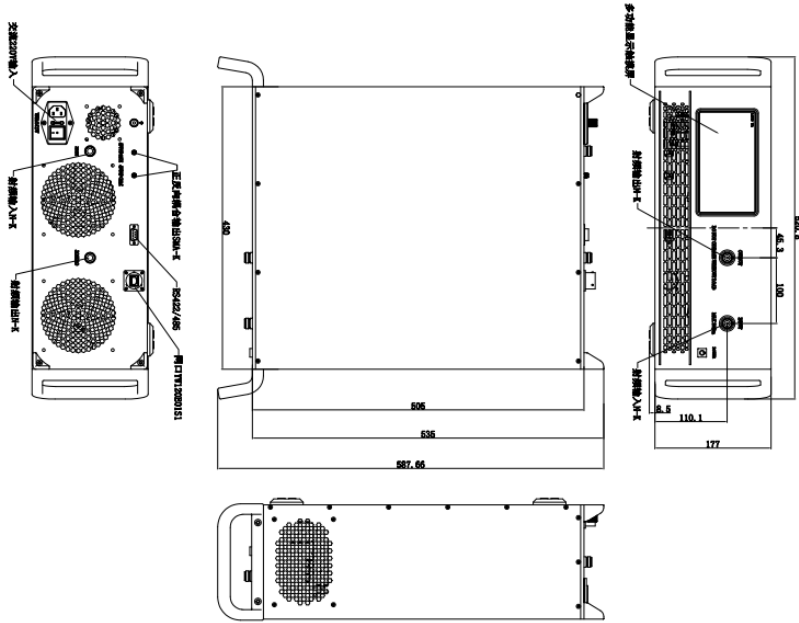

Key Features:



Parameter	Advantages
Control	RS422/LAN 7" LCD
Protection functions	1, Over TEM 2, Over voltage 3, Over current protection 4, Over VSWR
Control functions	1, Power setting On/Off 2, Psat Adjust
Cooling system	Built in Cooling system, forced air cooling

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-20		+40	°C
Non-operating Temperature	-45		+65	°C
Relative humidity		95		%
Altitude	50000			feet
Shock / Vibration(MIL-STD- 810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TLPA40G60G-47-47-BC	Solid State High Power Amplifier Systems 40-60GHz,Gain:47dB,Psat:47dBm,220V AC,Built in Fan Cooling	Rev.1.0