

SPDT Coaxial Switches

R12-CL12106-HS, Coaxial Switches, SPDT, SC, Latching, 12VDC, Self cut off & TTL, DC to 6 GHz, Solder Pin, Seal
R12-CL24106-HS, Coaxial Switches, SPDT, SC, Latching, 24VDC, Self cut off & TTL, DC to 6 GHz, Solder Pin, Seal
R12-CL28106-HS, Coaxial Switches, SPDT, SC, Latching, 28VDC, Self cut off & TTL, DC to 6 GHz, Solder Pin, Seal

电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-6 GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Latching
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	1 million min
TTL input	0-0.8 V(OFF), 2.4-5 V(ON)
额定电压 Rated voltage	12 24 28 VDC
工作电流 Operating current at 23 °C	310 170 130 mA



射频特性 RF Specifications:


频率范围 FREQUENCY RANGE(GHz)	DC-2	2-4	4-6
插入损耗 INSERTION LOSS (MAX) dB	0.2	0.3	0.5
隔离度 ISOLATION (MIN) dB	70	60	60
电压驻波比 V.S.W.R. (MAX)	1.15:1	1.3:1	1.5:1

环境和物理特性 Environmental And Physical Characteristics:


参数 Parameter	条件 Condition
工作温度范围 Operating temperature range	-55°C to +85°C
振动 Sine vibration(Operating)	20-2000Hz, 10g
冲击 Shocks(Non Operating)	50g / 11ms, ½ sine
射频接口 RF Connector type	SC Female
控制接口 Control connector	Solder Pin
重量 Weight	260g Max
外壳颜色 Hosing Color	黑色 Black

备注: 如果客户需要其他外壳颜色, 请联系业务备注


外形尺寸 Outline Drawing: Unit: mm

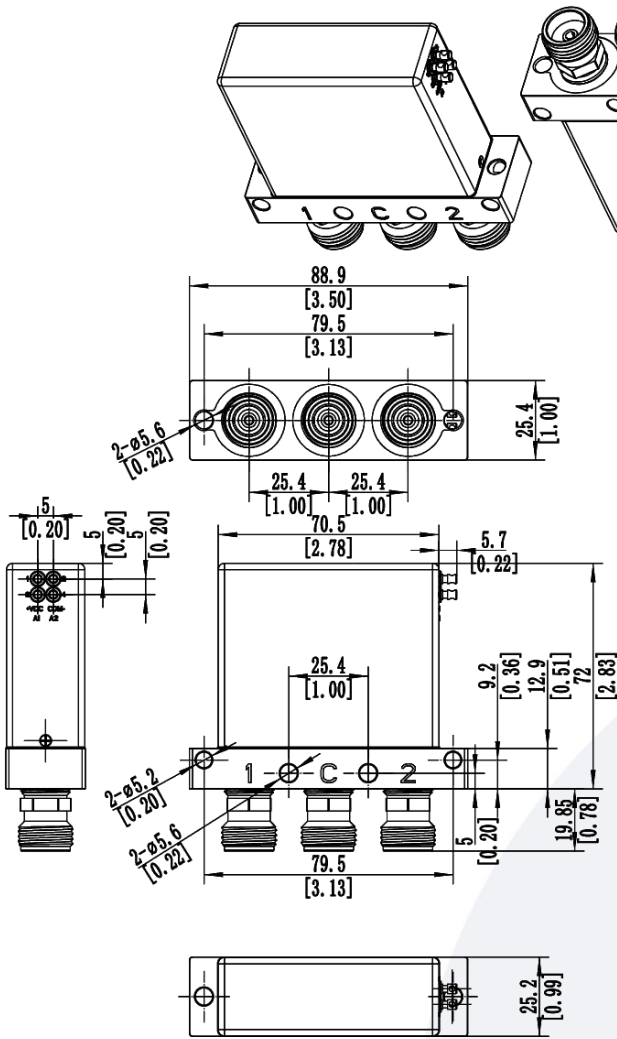

原理图 Schematic:

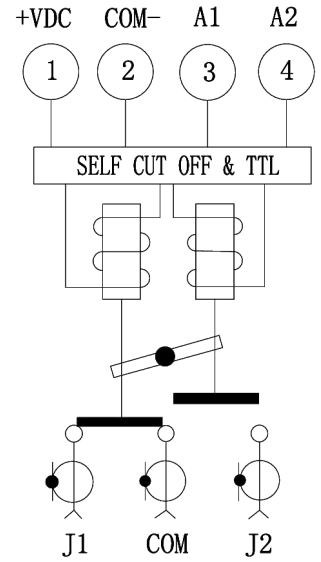


功率曲线图 Average power:

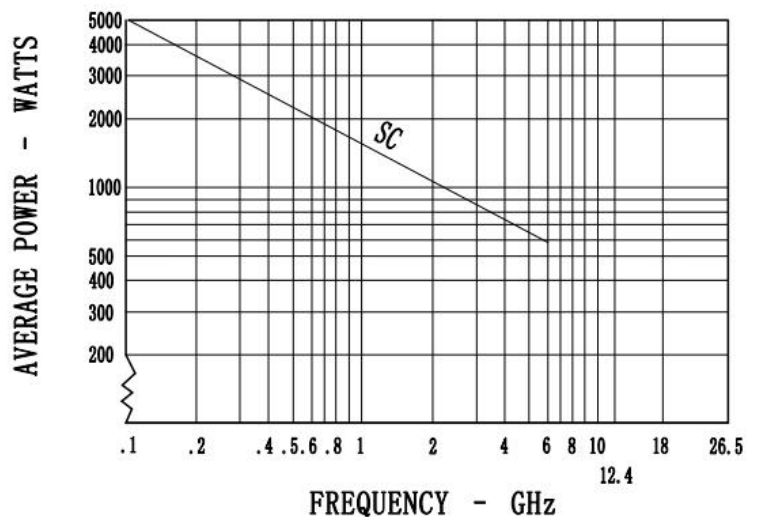

This graph is based on the following conditions:

- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

针脚定义 **Pin Definition:**

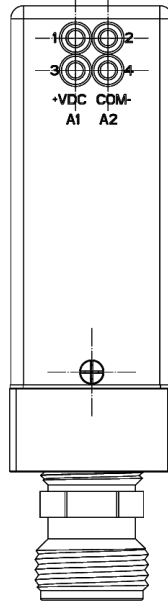

Solder Pin		RF Connect Used
Pin NO.	Function	SPDT
1	+VDC	
2	COM-	
3	A1(TTL IN)	J1-COM
4	A2(TTL IN)	J2-COM

标准型号 **Part Number:**

标准型号 Part Number	驱动电压 Actuator voltage
SPDT	
R12-CL12106-HS	12VDC
R12-CL24106-HS	24VDC
R12-CL28106-HS	28VDC