

Model: TLLA4G8G-25-11
Low Noise Amplifier
4-8GHz, NF:1.1dB, Gain:25dB, P1dB:16dBm
Feature:

- Ultra Wide Band: 4-8GHz
- Gain: 25dB Min
- Noise Figure: 1.1dB Typ.
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Electrical Specifications:

Parameter	Min	Typ	Max	Units
Frequency range	4-8			GHz
Gain	25			dB
Gain Flatness		±1.0		dB
Noise Figure		1.1		dB
Output P1dB	14	16		dBm
Input VSWR		2.0	2.2	:1
Output VSWR		2.0	2.2	:1
DC Voltage		+12		V DC
DC Supply Current		80		mA
Impedance	50			Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	32.1*29.2*11	mm


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15V
RF Input Power	15 dBm
ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
 Benchtop Amplifier**

Outline Drawing:

Unit: mm

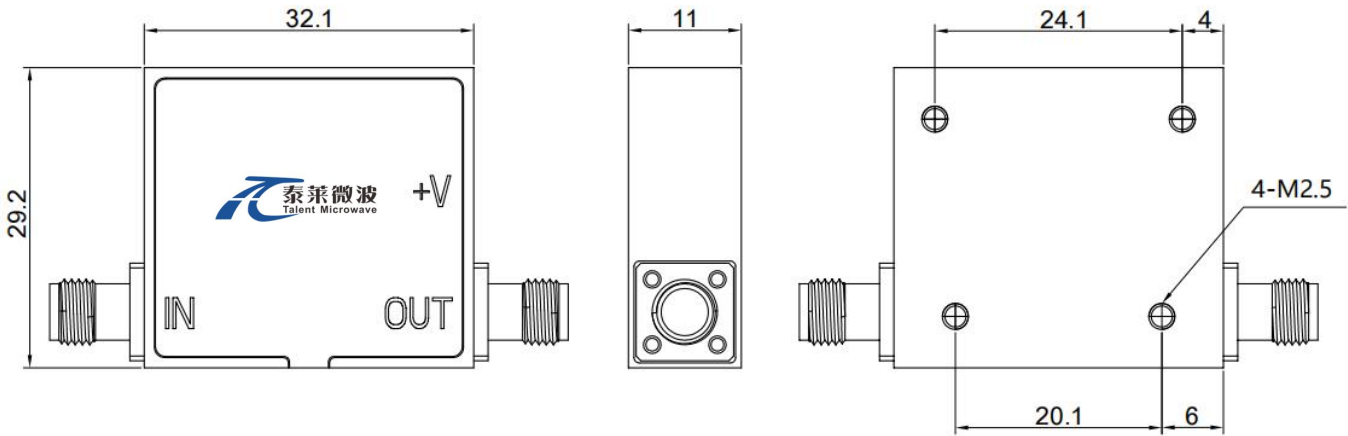

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:


Part Number	Description	Revision
TLLA4G8G-25-11	Low Noise Amplifier, 4-8GHz, Noise Figure:1.1dB, Gain:25 dB,P1dB:16dBm,+12V DC,Without Heatsink	Rev.1.2
TLLA4G8G-25-11-HS	Low Noise Amplifier, 4-8GHz, Noise Figure:1.1dB, Gain:25 dB,P1dB:16dBm,+12V DC,With Heatsink	Rev.1.2

Typical Performance Data:


Gain&VSWR vs Frequency

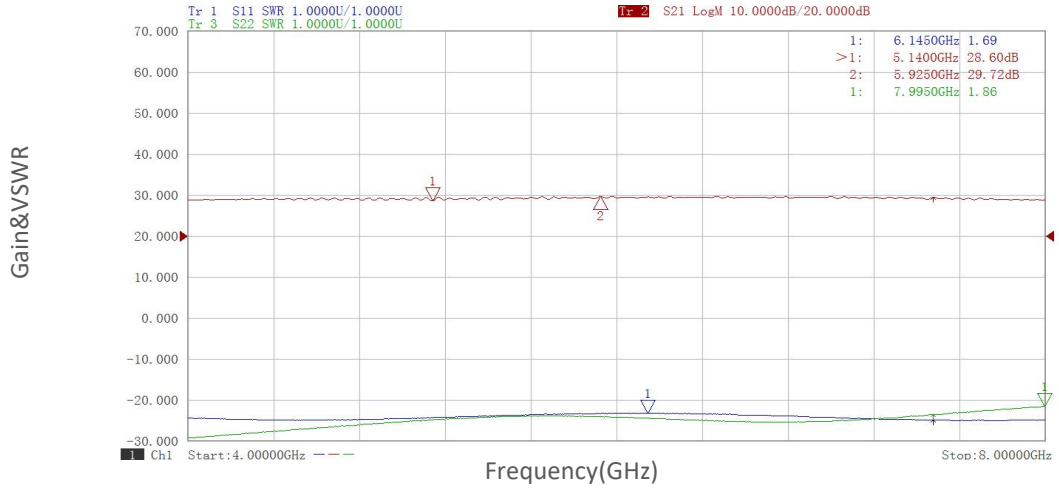

Noise Figure vs Frequency

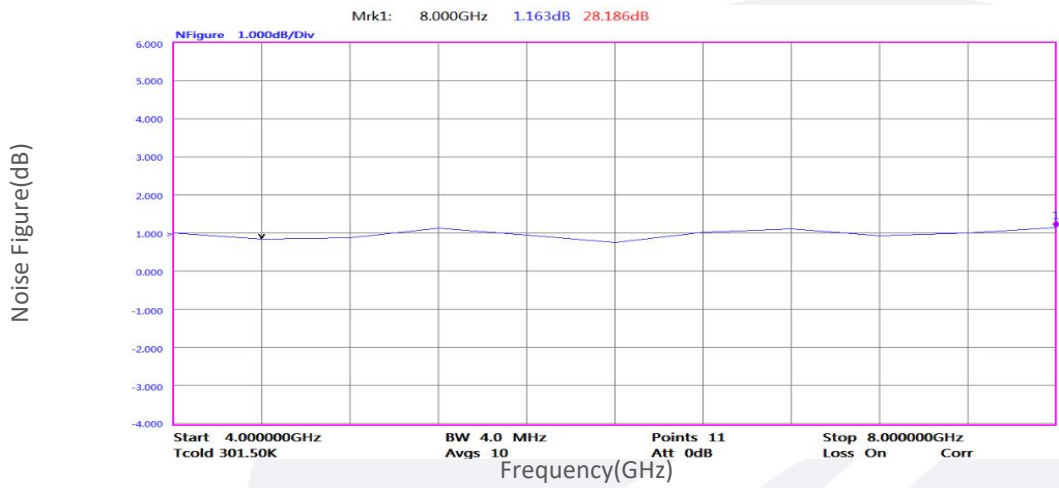


Gain vs Output Power

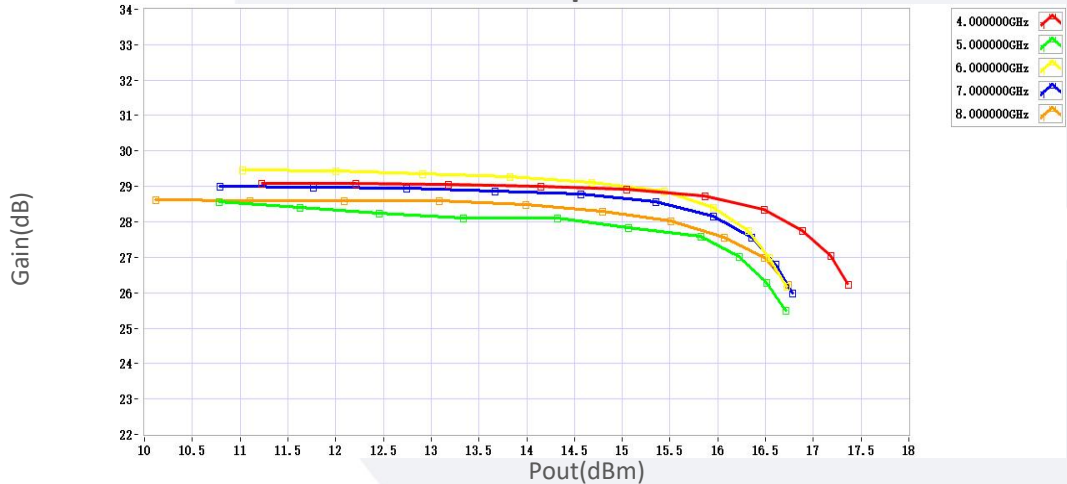

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

P1dB vs Frequency

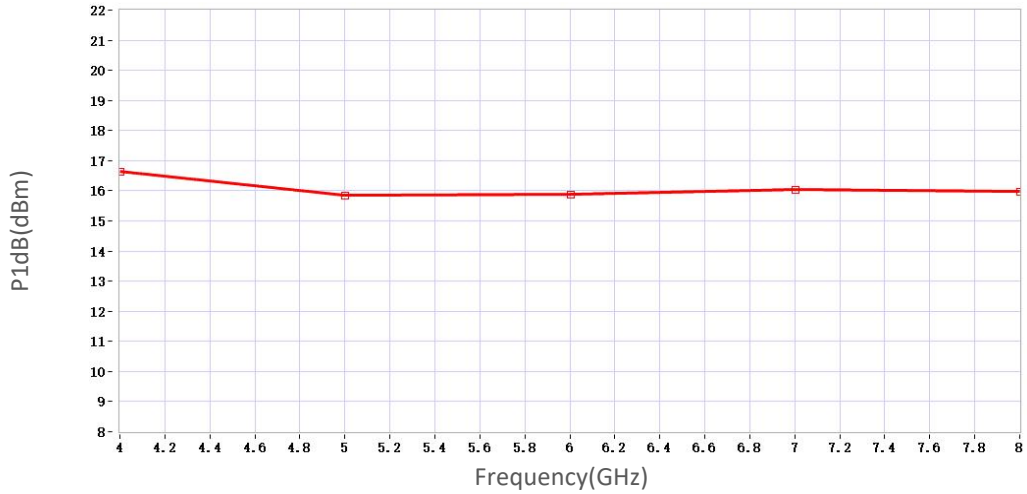

2nd Harmonic vs Output Power



Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.