

Low Noise Amplifier

8-12GHz /1dB NF/32dB Gain/15 dBm P1dB

Model: TLLA8G12G-32-10

TLLA8G12G-32-10 is a low noise amplifier with a small signal gain of 32 dB and a nominal noise figure of 1.0 dB across the frequency range of 8 to 12 GHz. The DC power requirement for the amplifier is +12 V DC/50 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Ultra Wide Band:8-12GHz
- Gain: 32dB Min
- Noise Figure: 1.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	8		12	GHz
Gain	32			dB
Gain Flatness		±1.5		dB
Noise Figure		1.0		dB
Output P1dB	12			dBm
Input VSWR		1.7	2.0	:1
Output VSWR		1.7	2.0	:1
DC Voltage	+6	+12	+15	V DC
DC Supply Current		50		mA
Impedance		50		Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	44.8*29.2*11	mm
Weight	55	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

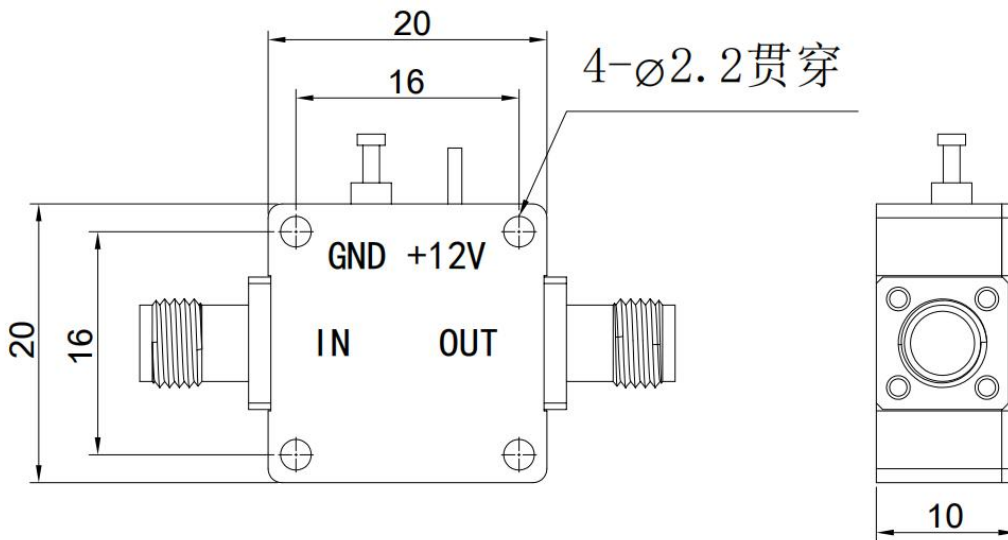

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:


Base Number	Description	Revision
TLLA8G12G-32-10	Low Noise Amplifier, 8-12GHz, Noise Figure:1.0dB, Gain:32 dB,P1dB:12dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA8G12G-32-10-HS	Low Noise Amplifier, 8-12GHz, Noise Figure:1.0dB, Gain:32 dB,P1dB:12dBm,+12V DC,With Heatsink	Rev.1.1

Typical Performance Data:

Gain&VSWR vs Frequency

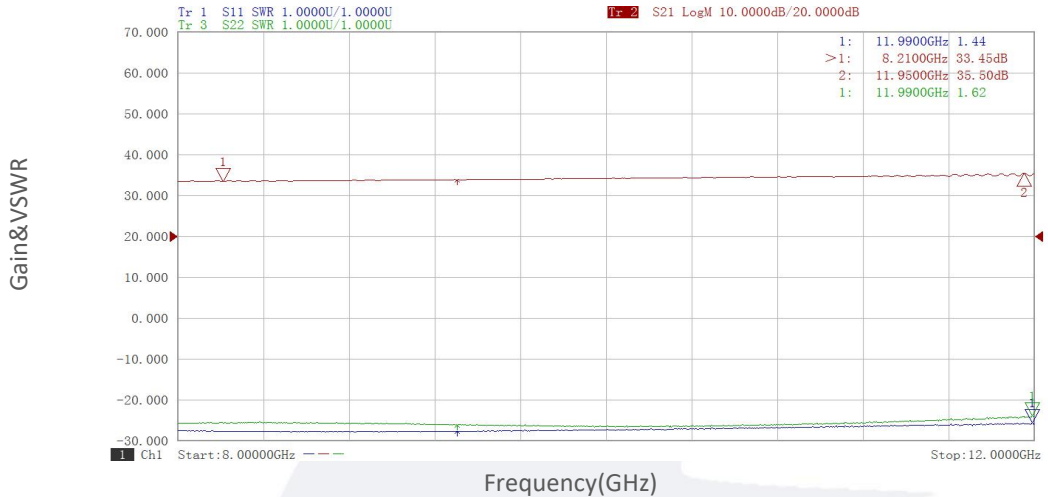


Noise Figure vs Frequency

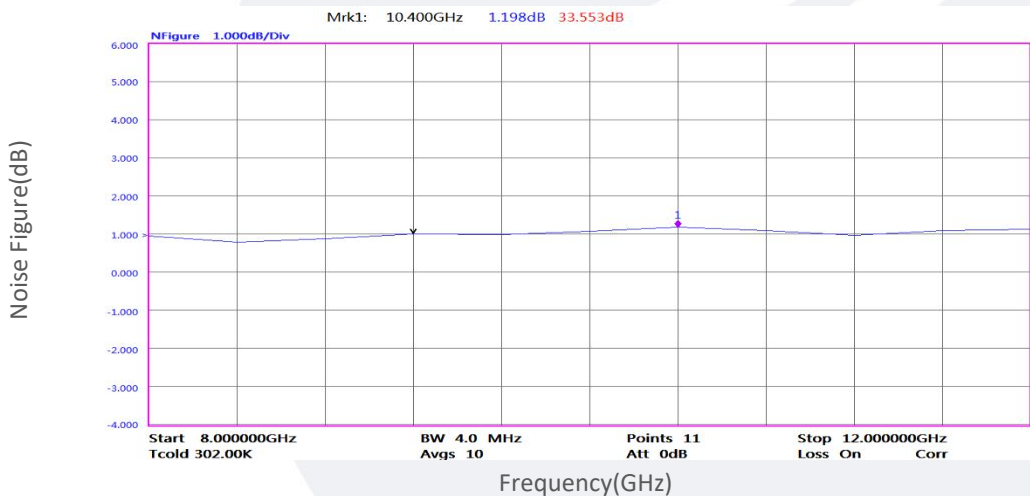


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Gain vs Output Power

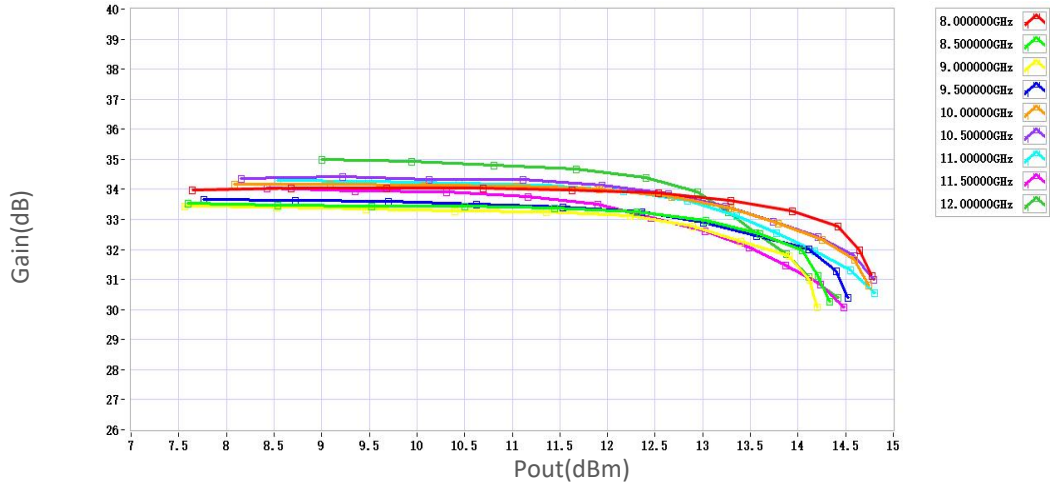

P1dB vs Frequency

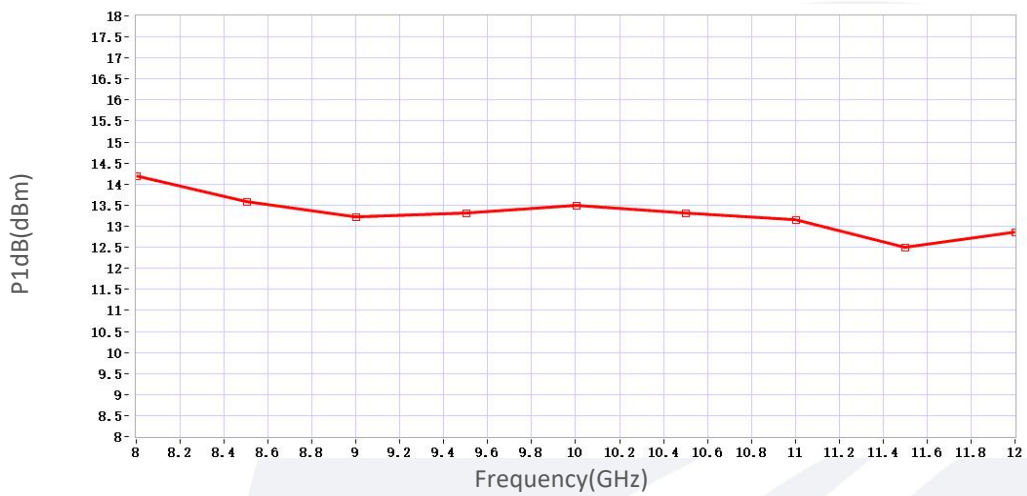

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Psat vs Frequency

Psat(dBm)

Frequency(GHz)

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

