

Power Amplifier

6-40GHz /32dB Gain/23 dBm Psat

Model: TLPA6G40G-32-22

TLPA6G40G-32-22 is a power amplifier with a typical small signal gain of 32 dB and a nominal Psat of 23 dBm across the frequency range of 6 to 40 GHz. The DC power requirement for the amplifier is +12 VDC/0.25 A. The input and output port configuration offers coax adapter structure with 2.92mm female.

Features:

- Frequency range: 6-40GHz
- Gain: 32dB Typ
- Output Power Psat: 23dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	6-40			GHz
Small Signal Gain		32		dB
Gain Flatness		±2		dB
Output P1dB	20	22		dBm
Output Psat		23		dBm
Noise Figure		6		dB
Input VSWR		1.7		:1
Output VSWR		1.7		:1
DC Voltage		12		V DC
DC Supply Current		255		mA
Impedance	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	2.92mm Female/2.92mm Female	
DC Bias	Solder Pin	
Size	44*36*12(Withoout Heatsink) 65*45*39(With Heatsink)	mm
Weight	25	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+13 V
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

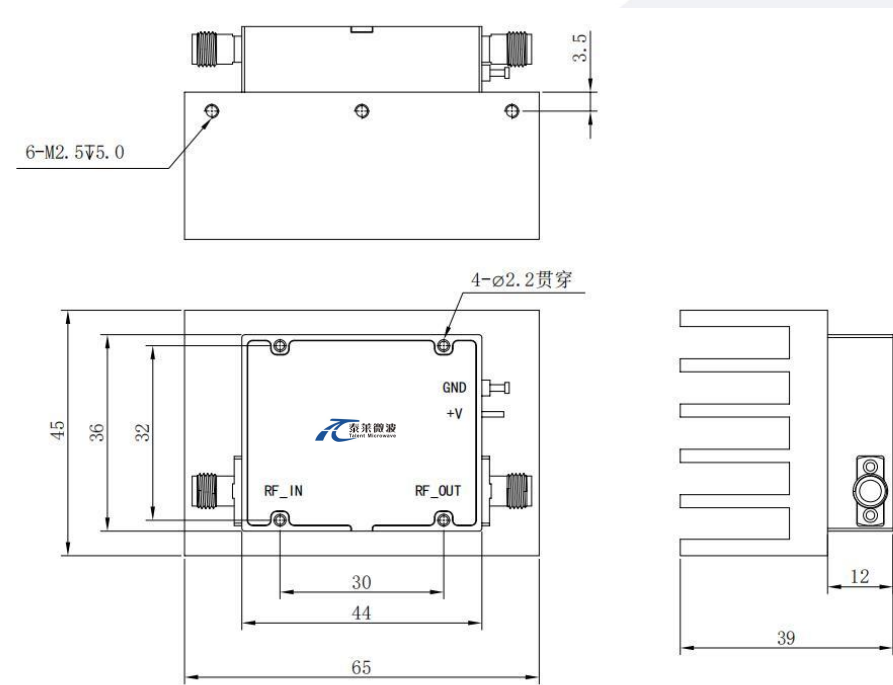

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA6G40G-32-22	Power amplifier 6-40GHz,Gain:32dB,Psat:23dBm, +12V DC,Without Heatsink	Rev.1.1
TLPA6G40G-32-22-HS	Power amplifier 6-40GHz,Gain:32dB,Psat:23dBm, +12V DC.With Heatsink	Rev.1.1

Typical Performance Data:


VSWR&Gain vs Frequency

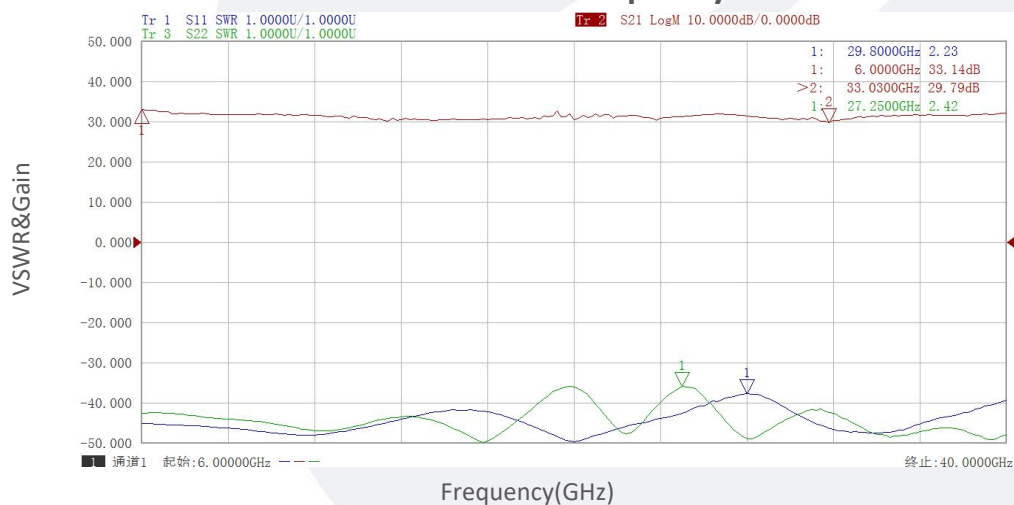


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Gain vs Output Power

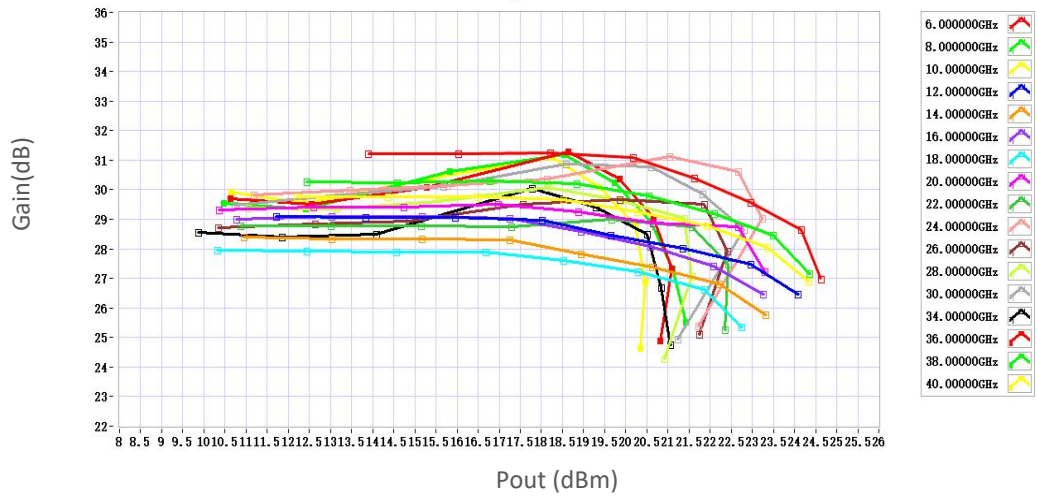

P1dB vs Frequency

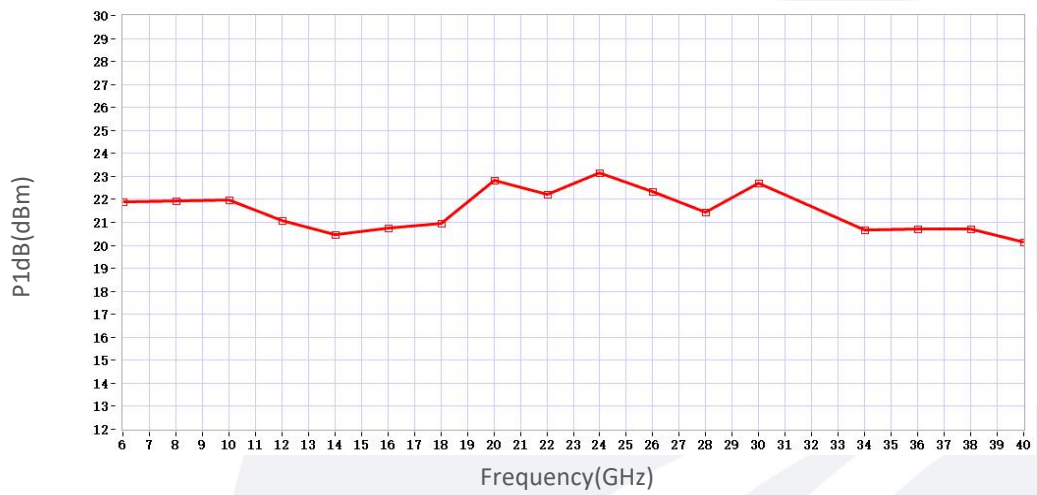

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.