

## Coaxial Lowpass Filter

DC-0.8 GHz/2.92mm

Model: TLLF-DC-08G-K

TLLF-DC-08G-K is a coaxial lowpass filter with a passband frequency from DC to 0.8 GHz . The nominal insertion loss of the filter is 1.0 dB and the typical rejection is 40 dB.

### Features:

- Passband Frequency Range DC to 0.8 GHz
- Low Insertion Loss

### Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

### Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	DC	0.8		GHz
Passband Insertion Loss			1.0	dB
Rejection	20@1.6GHz,40@2GHz			dB
Power Handling			1	W
Return Loss		20		dB
Impedance	50			Ohms

### Envrionmental And Physical Characteristics:


Description	Parameter	Units
Operating Temperature	-55 To +125	°C
Storage Temperature	-65 to +150	°C
Connectors	2.92mm	

**Outline Drawing:**


Unit:mm

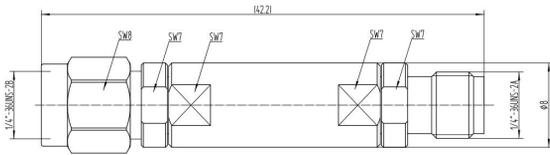

TLLF-DC-08G-K

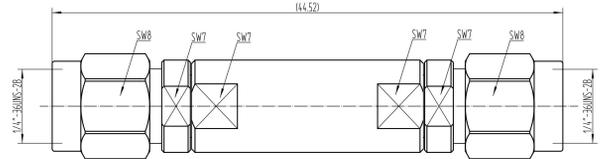

TLLF-DC-08G-MM

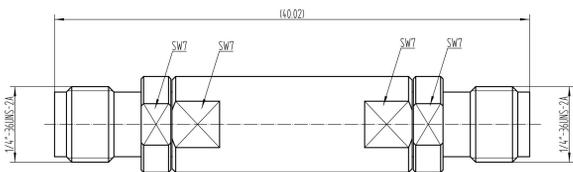

TLLF-DC-08G-FF



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

**Ordering Information:**

Base Number	Description	Revision
TLLF-DC-08G-K	Coaxial Lowpass Filter, Passband frequency range: DC-0.8GHz, Passband Insertion Loss: 1.0dB, 2.92mm Male/2.92mm Female Coaxial Fixed Termination	Rev.1.1
TLLF-DC-08G-MM	Coaxial Lowpass Filter, Passband frequency range: DC-0.8GHz, Passband Insertion Loss: 1.0dB, 2.92mm Male Coaxial Fixed Termination	Rev.1.1
TLLF-DC-08G-FF	Coaxial Lowpass Filter, Passband frequency range: DC-0.8GHz, Passband Insertion Loss: 1.0dB, 2.92mm Female Coaxial Fixed Termination	Rev.1.1