

## Solid State High Power Amplifier Systems

200-1000MHz/63dB Gain/63dBm Psat/380V AC      Model: TLPA200M1000M-63-63-BC

TLPA200M1000M-63-63-BC is a solid state high power amplifier systems provides high output power and high gain across the 200 to 1000 GHz frequency range. The amplifier features a built-in 380V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

### Features:

- Frequency range: 200-1000MHz
- Gain: 63dB Min
- Psat Output Power: 63dBm Min
- Protection: Over TEM, over voltage, over current, over VSWR protection
- 50 Ohm Matched Input / Output

### Electrical Characteristics:

Parameter	代码 Symbol	Min	Typ	Max	Units
Frequency range	BW	200		1000	MHz
Power Gain	GP	63			dB
Gain flatness	ΔGL			±4	dB
Output Psat	Psat	63			dBm
Spurious@Pout=63dBm	Spur			-50	dBc
Harmonics@Pout=63dBm	HAM		-15	-10	dBc
Input VSWR	VSWRin			2	:1
AC Voltage	Vac		380		V AC
Power Consumption	Pdiss			8000	W
Impedance	I/O-IMP		50		Ohms

### Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector*	N Female/1 5/8 Female	
Forward/Reverse Coupling	N Female/N Female	
Communication Connector	DB9/RJ45	
Front Panel LCD Screen Display	7 inch LCD Screen Display	
Size	19 Inch 11U*800	mm
Weight	≤200	Kg


\*Note: The RF output interface position may be adjusted.

### Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

### Outline Drawing:

Unit:mm; Tolerance:±0.1mm

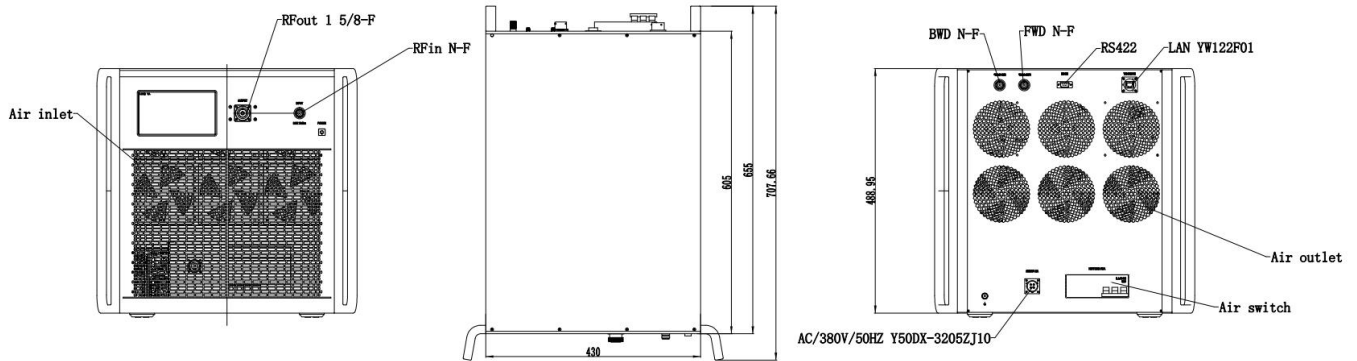

### Key Features:

Parameter	Advantages
Control functions	1, Power setting on/off 2, RF setting on/off 3, ALC automatic level control
Protection functions	1,Over TEM 2,Over voltage 3,Over current 4,Over VSWR
Monitoring function	1, Temperature 2, Working voltage/current 3, Output power
Remote control	RS422/Ethernet
Cooling system	Built in Cooling system,forced air cooling

### Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

### Ordering Information:

Base Number	Description	Revision
TLPA200M1000M-63-63-BC	Solid State High Power Amplifier Systems 200-1000MHz,Gain:63dB,Psat:63dBm,380V AC,Built in Fan Cooling	Rev.1.0