

Active Frequency Multiplier

X2/18-52GHz/16dBm Output Power

Model: TLAM-1852-0216-V

TLAM-1852-0216-V is an active X2 frequency multiplier. The multiplier has an input frequency of 9 to 26 GHz with a typical input power of -6 to dBm and an output frequency of 18 to 52 GHz with a typical output power of +16 dBm. The DC power requirement for the multiplier is +12 V DC/150 mA. The input port configuration is female SMA connector and output port configuration is female 1.85mm connector.

Features:

- Output Frequency:18-52GHz
- Output Power :16dBm Typ
- Low power consumption
- 50 Ohm Matched Input / Output

Applications:

- Synthesizers
- Local oscillators

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
输出频率 Output Frequency	18		52	GHz
输出功率 Output Power		+16		dBm
输入频率 Input Frequency	9		26	GHz
输入功率 Input Power		-6	-4	dBm
倍频次数 Multiply Factor		2		
谐波抑制 Harmonic Suppression		-20		dBc
供电电压 DC Voltage		+12		V
供电电流 DC Supply Current		150		mA

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输出接口 Output Connector	1.85mm Female	
输入接口 Input Connector	SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	44.8*29.2*11	mm

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15 V
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

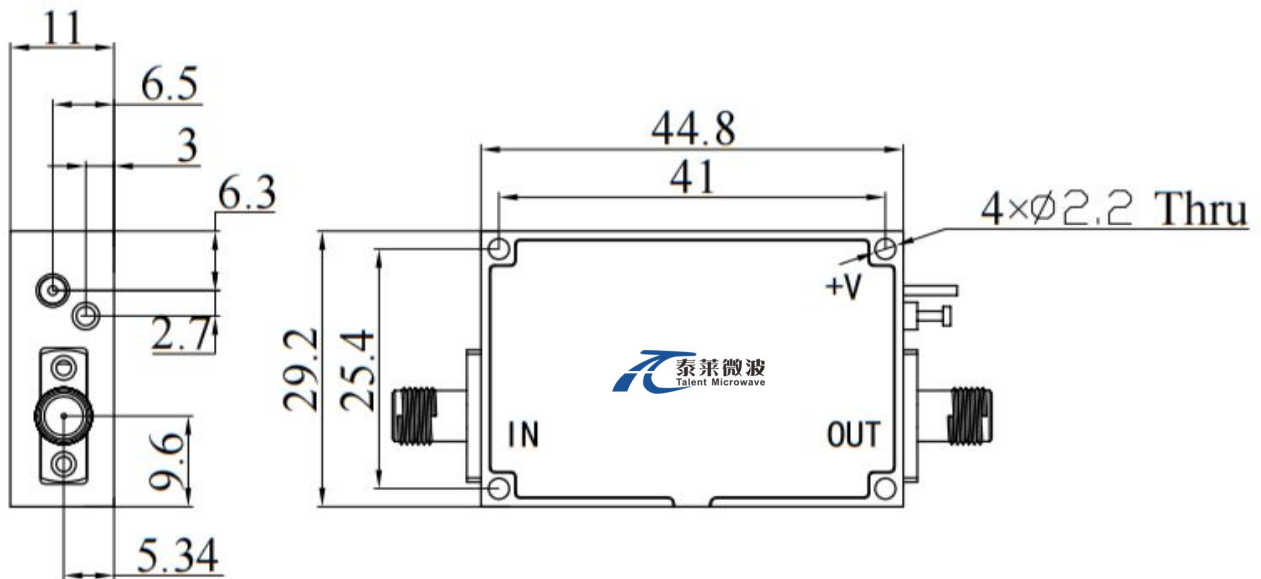

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-55		+85	°C
存储温度 Non-operating Temperature	-68		+150	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLAM-1852-0216-V	Active Multiplier , X2, 18-52GHz,+16dBm Output Power	Rev.1.0

典型曲线 Typical Performance Data:


Output Power vs Frequency

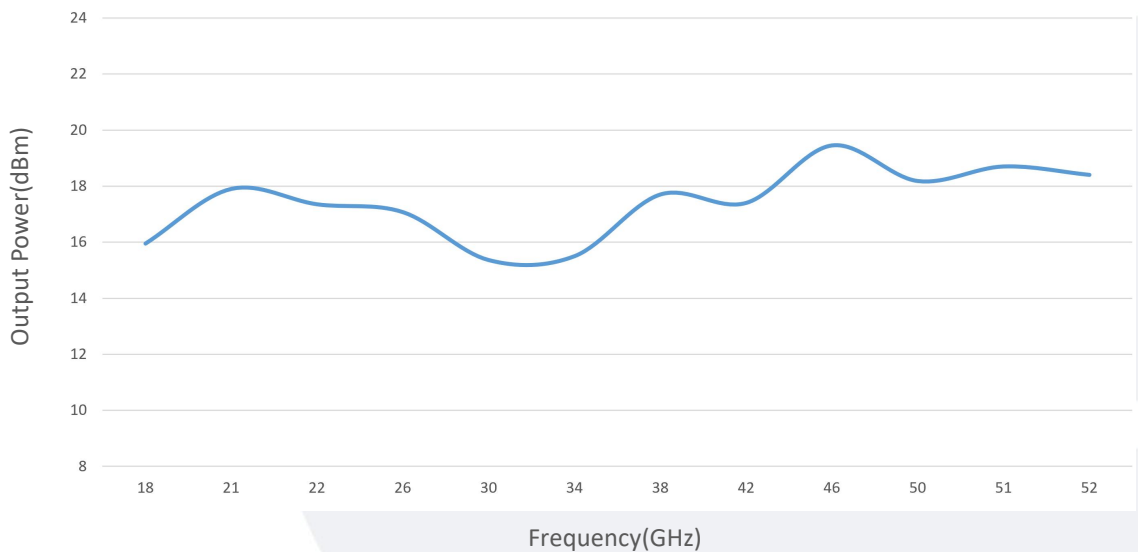

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Harmonic Suppression vs Frequency

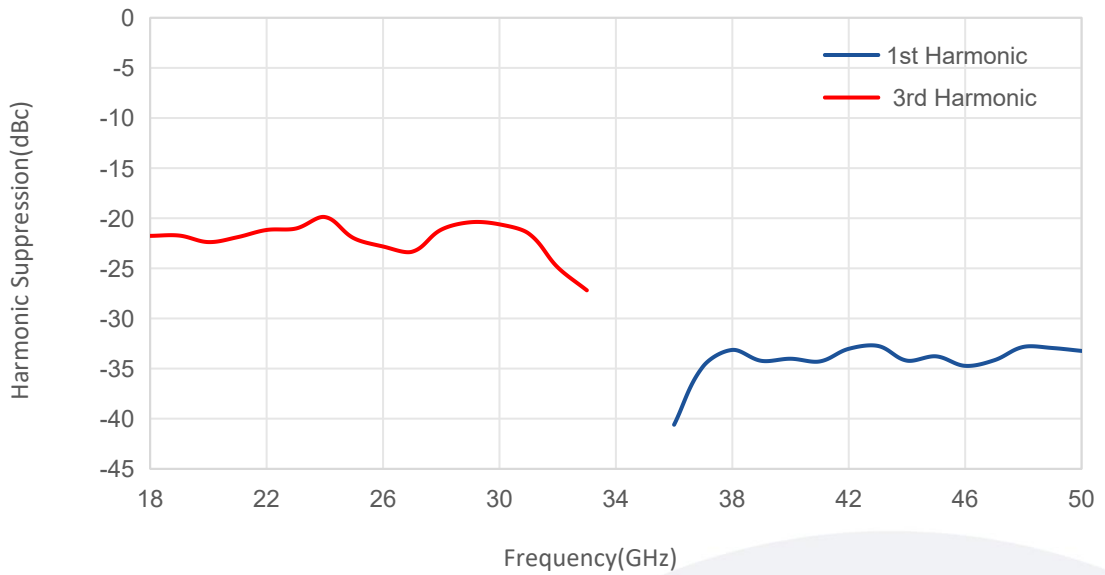

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.