

Model: TLHM—060090-06-12

Spectrum Analyzer Harmonic Mixer
RF:60-90 GHz ,IF:DC-1.8GHz, 6th

Feature:

- Designed for Keysight PXA series and R&S FSW series
- Full Waveguide Band Operation
- Compact Package
- 3 port design
- 6th Harmonic Detection

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
RF频率 RF Frequency	60		90	GHz
LO频率 LO Frequency	7.44		15.34	GHz
IF频率 IF Frequency	DC		1.8	GHz
LO 驱动功率 LO-Input power		+15		dBm
输入功率 Input Power			0	dBm
RF 驻波 RF VSWR			3.0	:1
SSB 变频损耗 Conversion Loss		-18		dB


机械特性 Mechanical :

参数Parameter	指标 Value	单位Units
RF 接口RF Connector	WR-12/UG-387	
LO接口LO Connector	SMA Female	
IF接口 IF Connector	SMA Female	
尺寸 Size	97*28*24	mm

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
RF 功率 RF Input Power	+0 dbm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

典型曲线 Typical Performance Data:

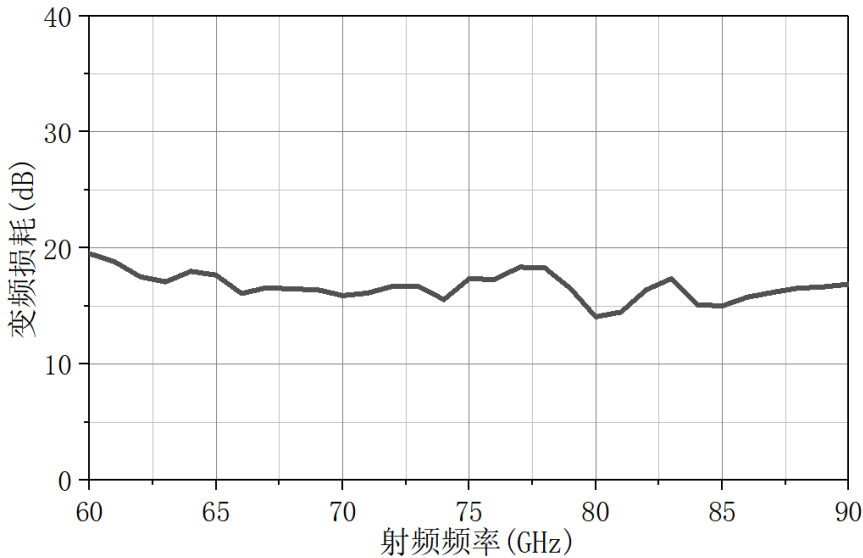

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	0		+45	°C
存储温度 Non-operating Temperature	-25		+65	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TLHM-060090-06-12	Spectrum Analyzer Harmonic Mixer RF:60-90 GHz ,IF:DC-1.8GHz, 3th , 3 port design	Rev.1.1