

Model: TLP8G18G-64-64-P-BC
**Solid State High Power Amplifier Systems
 8-18GHz, Gain: 64dB, Psat: 64 dBm, 220V AC**
Feature:

- Wide Band: 8-18GHz
- Gain: 64dB Min
- Psat Output Power: 64dB Min
- Protection: Over TEM, over voltage, over current, over VSWR protection.
- 50 Ohm Matched Input / Output


电气特性 Electrical Specifications:

参数 Parameter	代码 Sympo	Min	Typ	Max	单位 Units
频率范围 Frequency range	BW	8-18			GHz
增益 Gain	GP	64			dB
增益平坦度 Gain flatness	Δ GL		± 4	± 4.5	dB
饱和输出功率 Output Psat	Psat	64	65		dBm
线性输出功率 Output P1dB	P1dB		47		dBm
杂散 Spurious	Spur			-60	dBc
谐波 Harmonics	HAM			-30	dBc
输入驻波 Input VSWR	VSWRin			2.0	:1
交流电压 AC Voltage	Vac	220			V AC
功耗 Power Consumption @5% @10% @20%	Pdiss	900/1700/3500			Watts
阻抗 Impedance	I/O-IMP	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入输出接口 Input /Output Connector	SMA Female/WRD750	
正向/反向耦合 Forward/Reverse Coupling	SMA Female/SMA Female	
液晶显示屏 Front Panel LCD Screen Display	7 inch LCD Screen Display	
尺寸 Size	19 Inch 5U*550 depth	mm
重量 Weight	45	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF INPUT POWER	10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

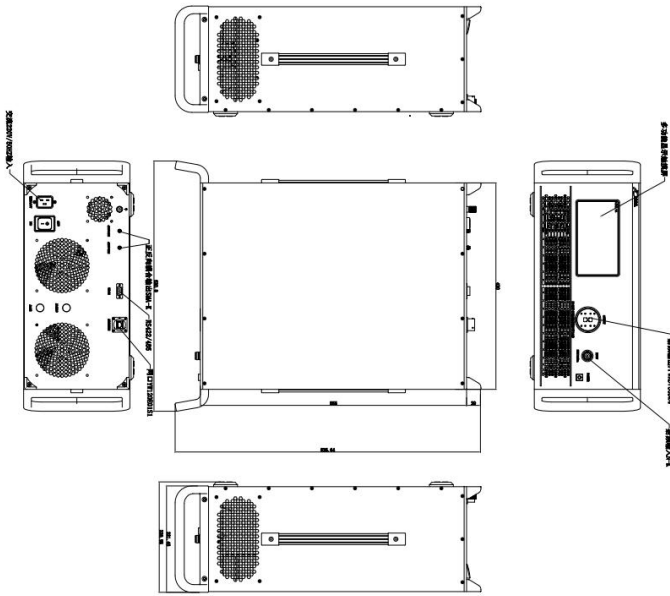

主要功能 Key Features:



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

参数 Parameter	特点 Advantages
控制功能 Control functions	1, Power setting On/Off 2, ALC automatic level control
内置保护功能 Protection functions	1, Over TEM 2, Over voltage 3, Over current protection 4, Over VSWR
冷却系统 Cooling system	Built in Cooling system, forced air cooling

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-20		+40	°C
存储温度 Non-operating Temperature	-45		+65	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50000			feet
震动 Shock / Vibration(MIL-STD- 810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TLPA8G18G-64-64-P-BC	Solid State High Power Amplifier Systems 8-18GHz, Gain:64dB, Psat:64 dBm, 220V AC, Built in Fan Cooling	Rev.1.0