

Model:TMAM-075110-0618-10
**W-Band Active Multiplier
 X6, 75-110 GHz ,16 dBm Output Power**
Feature:

- Output Frequency: 75-110GHz
- Output Power : 16 dBm Typ
- Low power consumption

电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
输出频率 Output Frequency	75		110	GHz
输出功率 Output Power	14	16		dBm
输入频率 Input Frequency	12.5		18.33	GHz
谐波抑制 Harmonics		-20		dBc
输入功率 Input Power			10	dBm
倍频次数 Multiply Factor		6		Time
供电电压 DC Voltage		+12		V
供电电流 DC Supply Current		890		mA

机械特性 Mechanical Specifications:

参数Parameter	指标 Value	单位Units
输出接口Output Connector	WR-10/UG-387/U	
输入接口Input Connector	SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	57.5*26*21	mm


绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+12 V
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


 Available 220V System
 Benchtop Amplifier

外形尺寸 Outline Drawing:

Unit: Inches(mm)

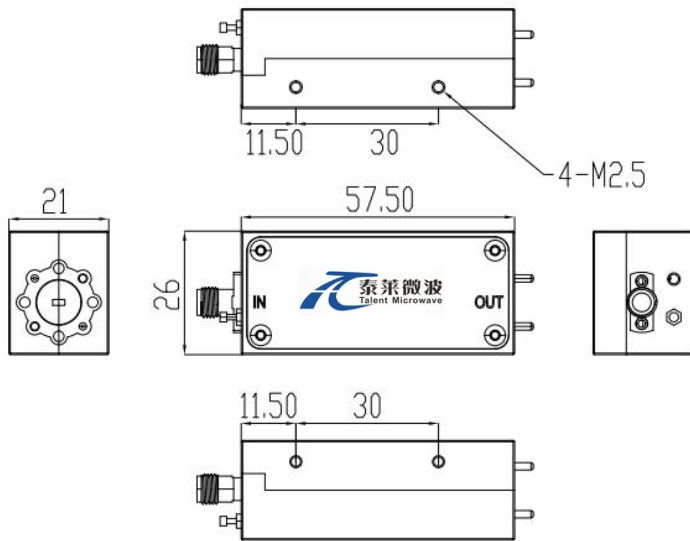

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:


参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-25		+75	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TMAM-075110-0618-10	Active Multiplier ,X6, 75-110 GHz ,Output Power:16 dBm, WR-10/UG-387/U, SMA Female	Rev.1.1

典型曲线 Typical Performance Data:

Output Power vs Frequency

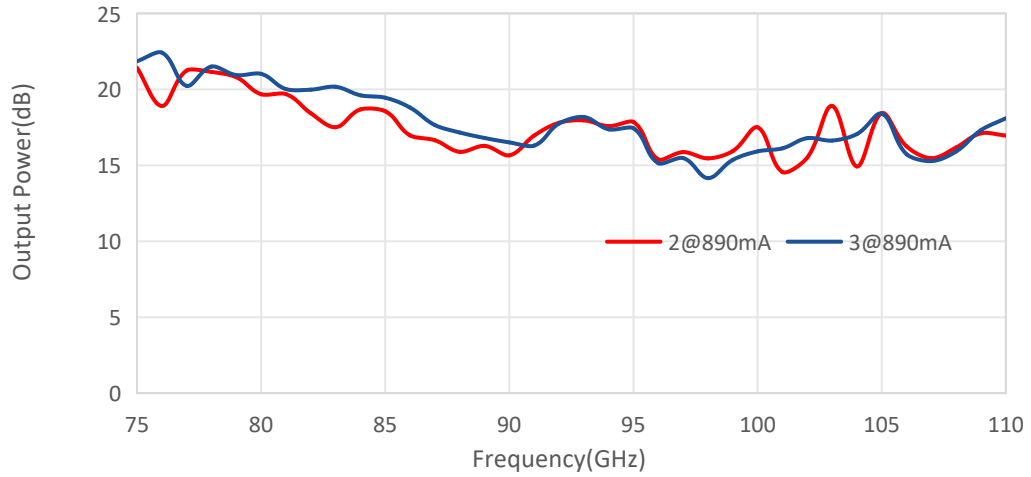

Harmonics vs Frequency

