


Model:TMAM-080086-0627-12
**Active Frequency Multiplier,
 X6,80-86GHz, 27dBm Output Power**
Feature:

- Output Frequency:80-86GHz
- Output Power :27 dBm Typ
- Low power consumption


电气特性 Electrical Specifications:

参数 Parameter	Min	Typ	Max	单位 Units
输出频率 Output Frequency	80		86	GHz
输出功率 Output Power	26	27		dBm
输入频率 Input Frequency	13.3		14.33	GHz
输入功率 Input Power	2	4	8	dBm
倍频次数 Multiply Factor		6		
输入回波损耗 Input Return Loss		10		dB
输出回波损耗 Output Return Loss		8		dB
供电电压 DC Voltage		+18		V
静态电流 Quiescent Current		330		mA
供电电流 DC Supply Current		680		mA

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输出接口 Output Connector	WR-12/UG-387/U	
输入接口 Input Connector	SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	56*83.6*68(Without Heatsink) 56*95.6*68(With Heatsink)	mm

绝对最大值 Absolute Maximum Ratings:


参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	8dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



Available 220V System
 Benchtop Amplifier

外形尺寸 Outline Drawing:

Unit: mm

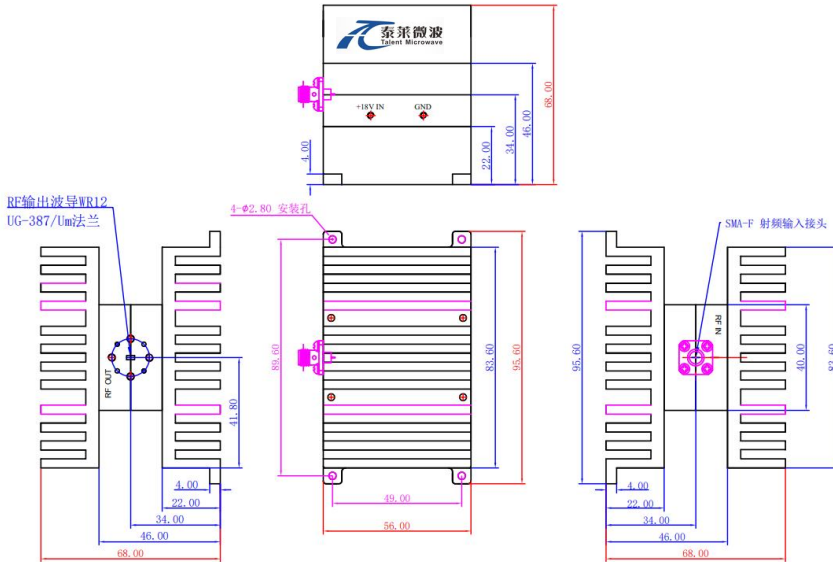

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-45		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		50,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TMAM-080086-0627-12	Active Multiplier,X6,80-86GHz, Output Power:27dBm,WR-12/UG-387/U,SMA Female	Rev.1.1

典型曲线 Typical Performance Data:

Output Power vs Frequency

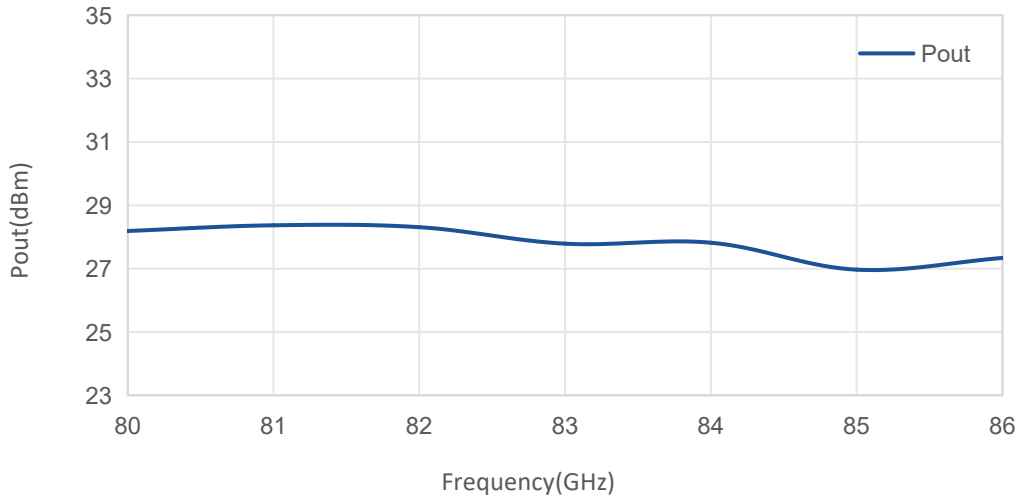

Input Return Loss vs Frequency

