

**Model:TLLA26G40G-35-50**
**Low Noise Amplifier**
**26-40GHz, NF:5.0dB, Gain:35dB,P1dB:21dBm**
**Feature:**

- Ultra Wide Band: 26-40GHz
- Gain: 35dB Min
- Noise Figure: 5.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

**电气特性 Electrical Specifications:**

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	26-40			GHz
增益 Gain	35			dB
增益平坦度 Gain Flatness		±2.0		dB
噪声系数 Noise Figure		5		dB
线性输出功率 Output P1dB		21		dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage	8	12		V DC
直流电流 DC Supply Current		200		mA
阻抗 Impedance	50			Ohms

**机械特性 Mechanical Specifications:**

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92mm Female/2.92mm Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	4.*35*12	mm
重量 Weight	50	g

**绝对最大值 Absolute Maximum Ratings:**

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+20V
输入功率 RF Input Power	15 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System  
Benchtop Amplifier**

**外形尺寸 Outline Drawing:**

Unit: mm(inches)



**\*\*\*Heat Sink Required During Operation**



OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES

**温度环境 Environmental Conditions:**


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

**订货信息 Ordering Information:**


标准型号 Part Number	描述 Description	版本号 Revision
TLLA26G40G-35-50	Low Noise Amplifier, 26-40GHz, Noise Figure:5.0dB, Gain:35 dB,P1dB:21dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA26G40G-35-50-HS	Low Noise Amplifier, 26-40GHz, Noise Figure:5.0dB, Gain:35 dB,P1dB:21dBm,+12V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:


### Gain&VSWR vs Frequency

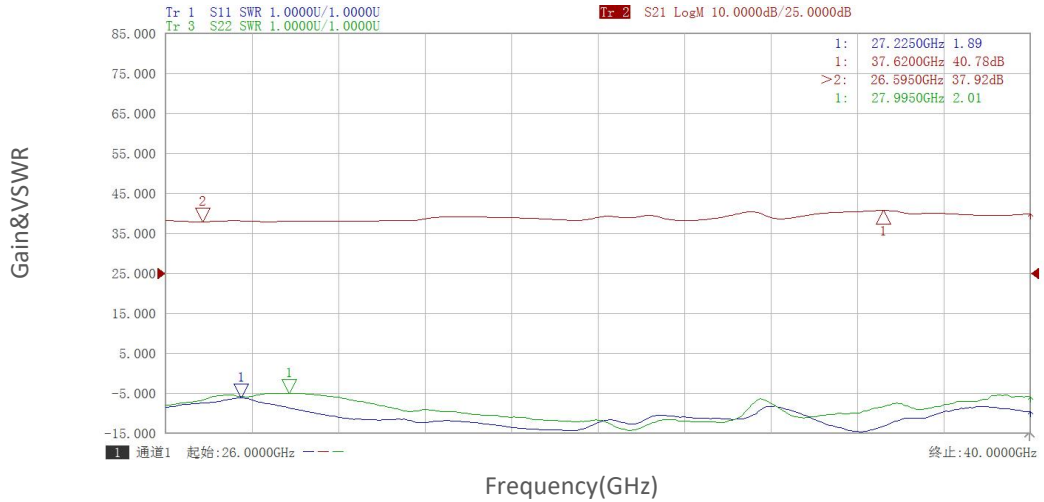

### Noise Figure vs Frequency

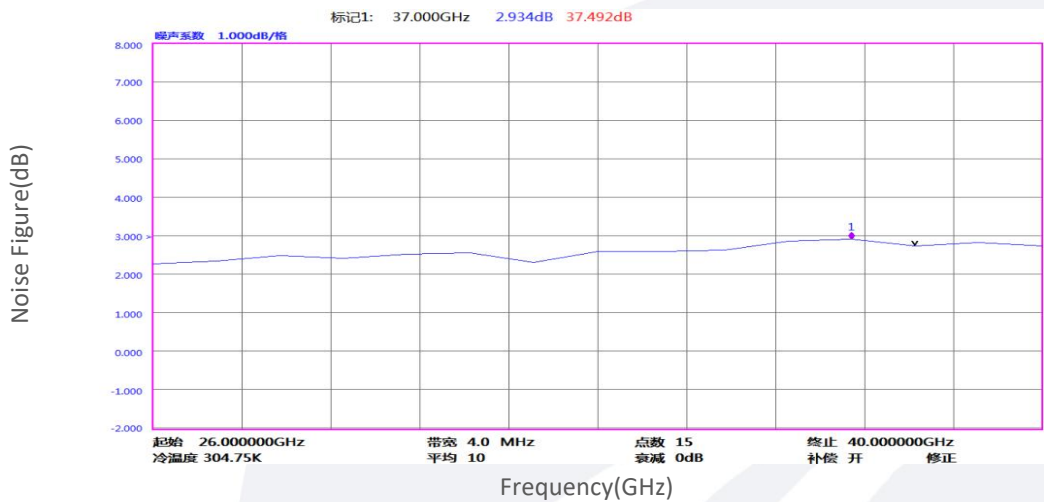


### Gain vs Output Power

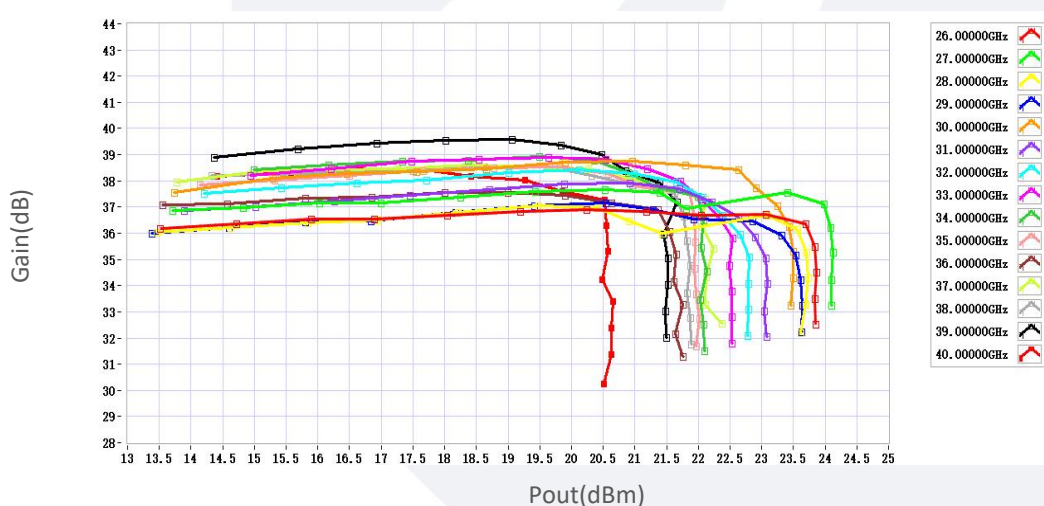

典型曲线 Typical Performance Data:

P1dB vs Frequency

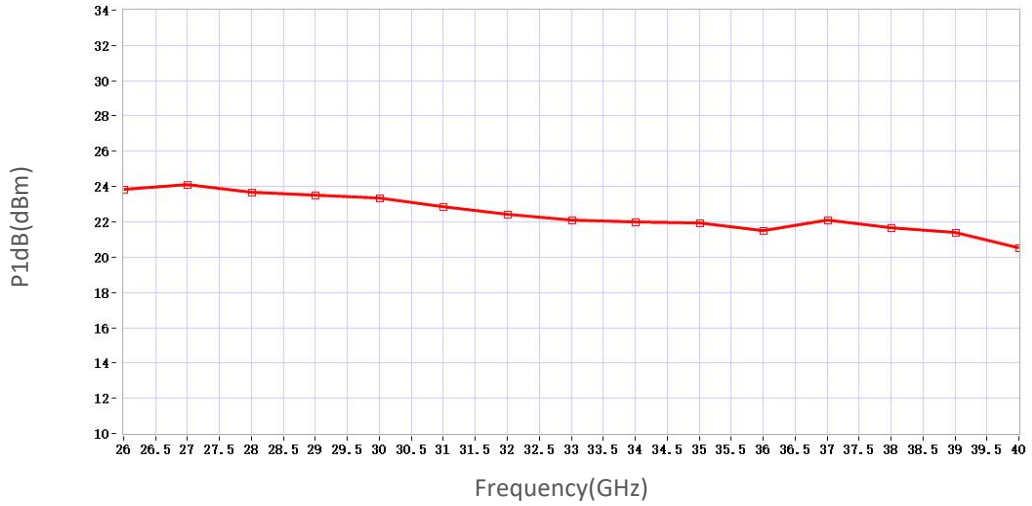

P3dB vs Frequency

