

## Model: TLPA0.5G6G-51-51-BC

## Solid State High Power Amplifier Systems 0.5-6GHz, Gain: 51dB, Psat: 51 dBm, 220V AC

### Feature:

- Wide Band: 0.5-6GHz
- Gain: 51dB Min
- Psat Output Power: 51dBm Min
- Protection: Over TEM, over voltage, over current, over VSWR protection.
- 50 Ohm Matched Input / Output



### 电气特性 Electrical Specifications:

参数Parameter	代码 Symbo	Min	Typ	Max	单位Units
频率范围 Frequency range	BW	0.5-6			GHz
小信号增益 Small Signal Gain	SSGP	51			dB
增益平坦度 Gain flatness	ΔGL		±3.5		dB
饱和输出功率 Output Psat	Psat	51			dBm
线性输出功率 Output P1dB	P1dB		47		dBm
杂散 Spurious@Pout=51dBm	Spur			-60	dBc
谐波 Harmonics@Pout=51dBm	HAM		-10		dBc
输入驻波 Input VSWR	VSWRin			2.0	:1
交流电压 AC Voltage	Vac	220			V AC
交流功耗 Power Consumption	Pdiss	1800@Max			Watts
阻抗 Impedance	I/O-IMP	50			Ohms

### 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位Units
输入/输出接口 Input /Output Connector	N Female/N Female	
液晶显示屏 Front Panel LCD Screen Display	7 inch LCD Screen Display	
尺寸 Size	19 Inch 4U*550 depth	mm
重量 Weight	35	Kg

### 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm



主要功能 Key Features:



OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES


参数 Parameter	特点 Advantages
控制功能 Control functions	1, Power setting On/Off 2, ALC automatic level control
内置保护功能 Protection functions	1, Over TEM 2, Over voltage 3, Over current protection 4, Over VSWR
控制和监控 Remote Control	RS422/Ethernet
冷却系统 Cooling system	Built in Cooling system, forced air cooling

**温度环境 Environmental Conditions:**

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-20		+50	°C
存储温度 Non-operating Temperature	-45		+65	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50000			feet
震动 Shock / Vibration(MIL-STD- 810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

**订货信息 Ordering Information:**


标准型号 Part Number	描述 Description	版本号 Revision
TLPA0.5G6G-51-51-BC	Solid State High Power Amplifier Systems 0.5-6GHz,Gain:51dB,Psat:51 dBm,220V AC,Built in Fan Cooling	Rev.1.0

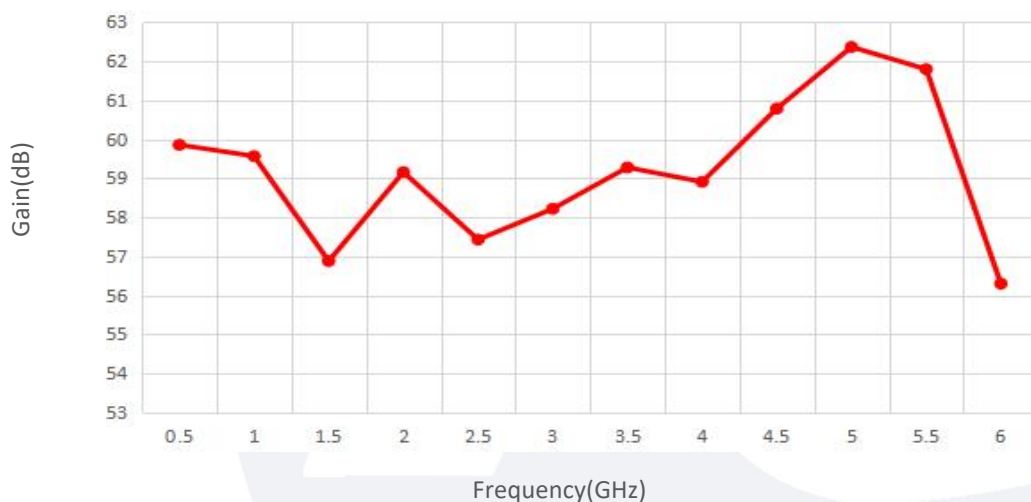**典型曲线 Typical Performance Data:**
**Small Signal Gain vs Frequency**


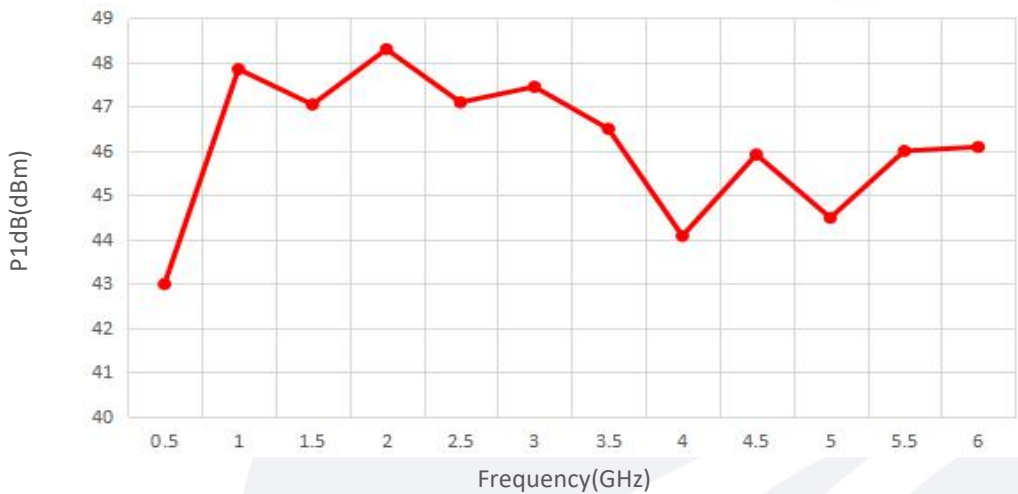
Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

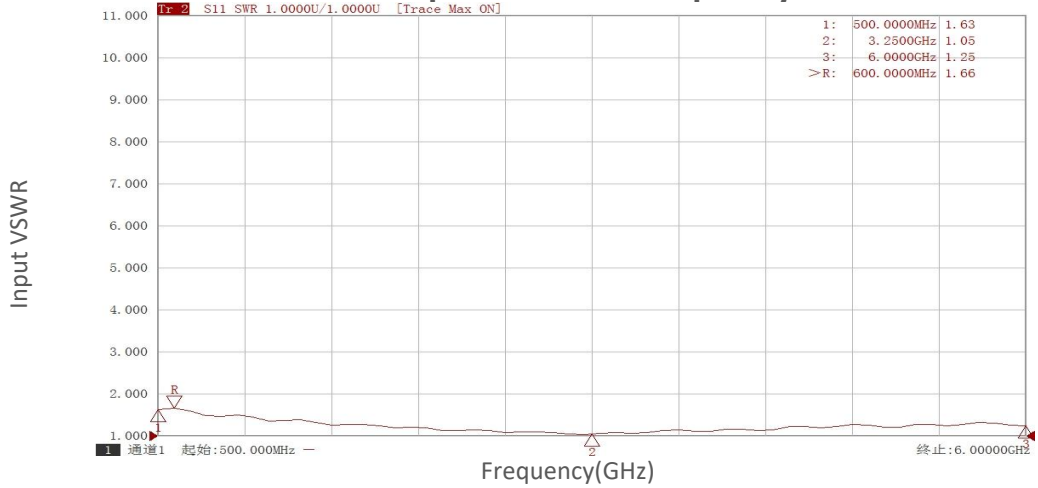

P1dB vs Frequency




Pout@Pin

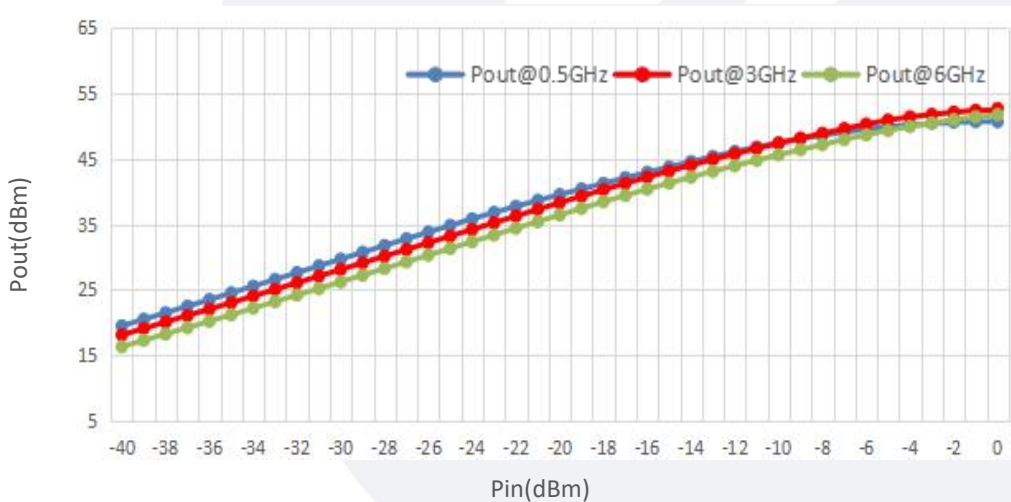


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Pout@Equal\_Pin

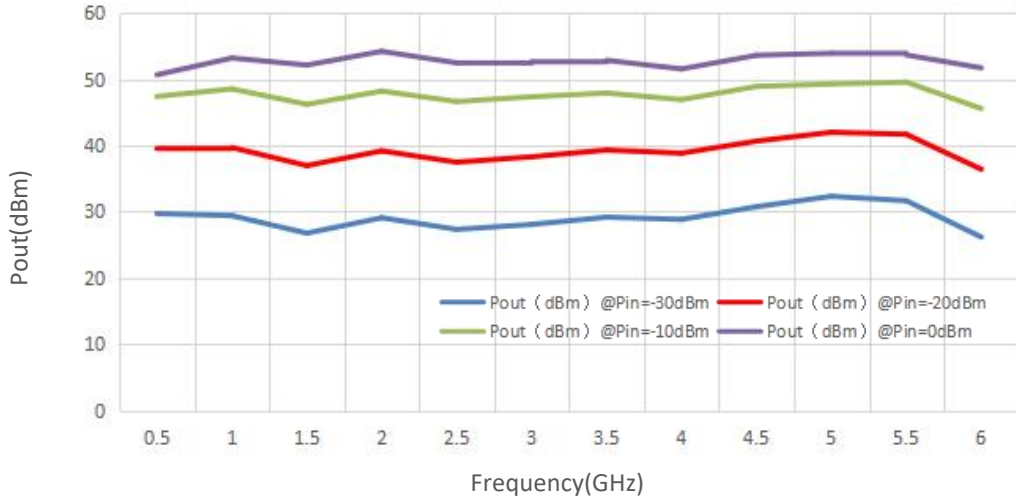

Harmonics vs Frequency

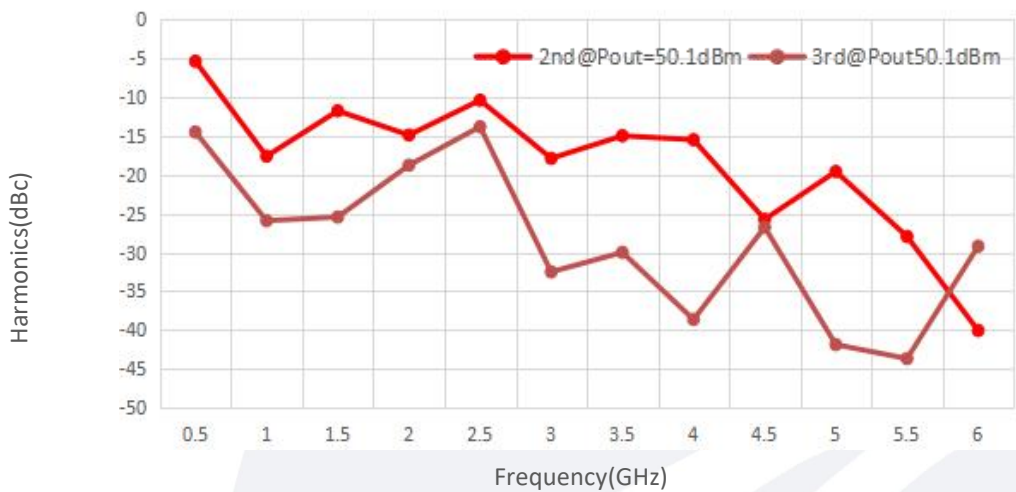

Spurious vs Frequency

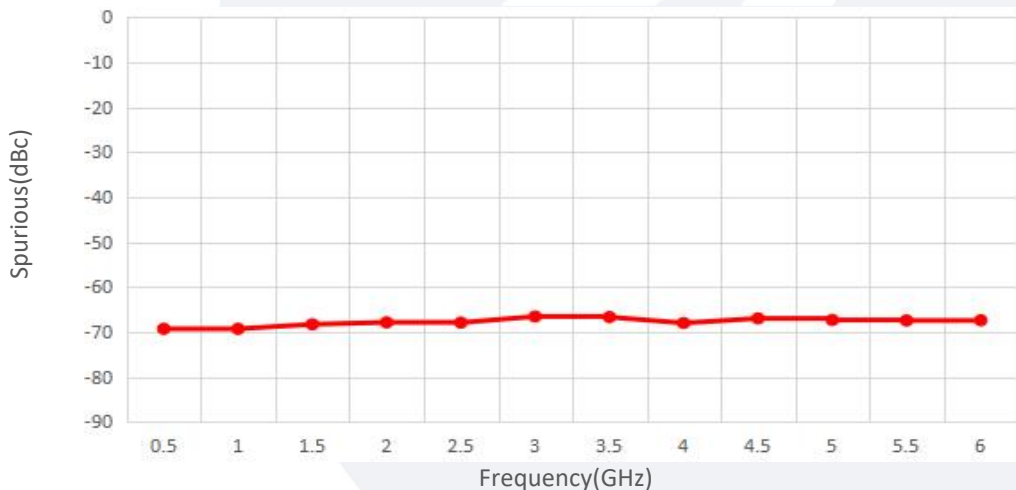

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.