

Low Noise Amplifier

WR-12/75-90GHz/5.5dB NF/17dB Gain

Model: TMLA-075090-1755-12

TMLA-075090-1755-12 is a low noise amplifier with a typical small signal gain of 17 dB and a nominal noise figure of 5.5 dB across the frequency range of 75 to 90 GHz. The DC power requirement for the amplifier is +12 VDC/50 mA. The input and output port configuration offers an inline structure with WR-12 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Frequency range: 75-90GHz
- Gain: 17dB Typ
- Noise Figure: 5.5dB Typ
- Unconditional stability

Applications:

- Passive Imaging
- 5G Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	75		90	GHz
Small Signal Gain		17		dB
Noise Figure		5.5		dB
Output P1dB		10		dBm
Input VSWR		2.5		:1
Output VSWR		2		:1
DC Voltage		12		V DC
DC Supply Current		50		mA

Mechanical Specifications:

Parameter	Value	Units
Input Connector	WR-12/ UG-387/U	
Output Connector	WR-12/ UG-387/U	
Power Supply Pin	Solder Pin	
Size	30*30*23	mm







Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

Regulatory Compliance:



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:


Base Number	Description	Revision
TMLA-075090-1755-12	Low Noise Amplifier,75-90GHz, Noise Figure:5.5dB, Gain:17dB,+12V DC,WR-12	Rev.1.1

Typical Performance Data:

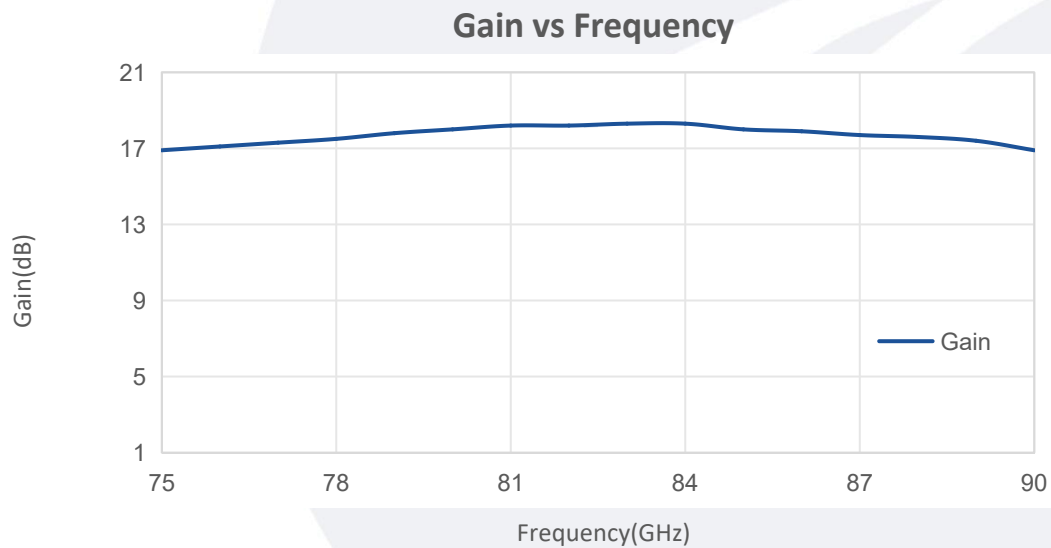

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

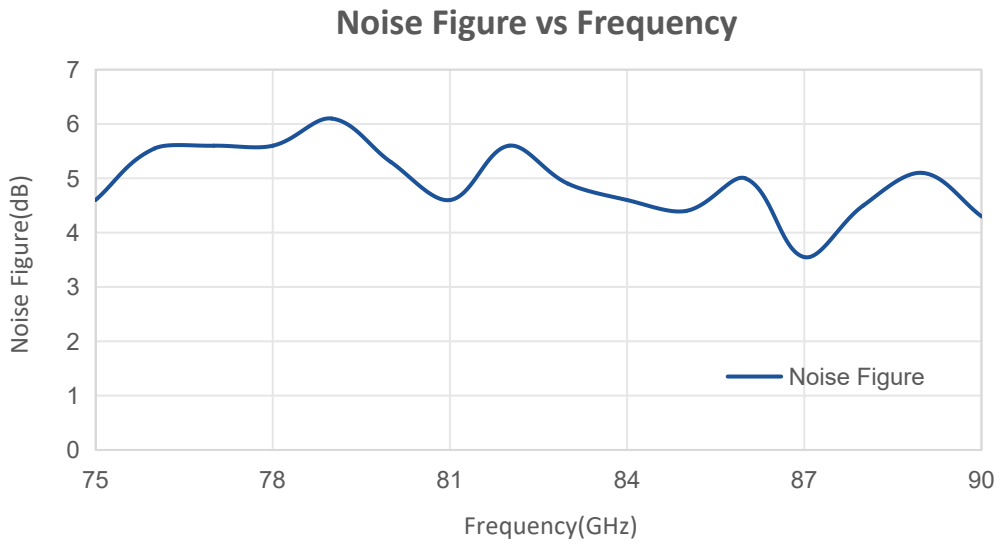

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.