

Solid State High Power Amplifier Systems

2-6GHz/56dB Gain/56dBm Psat/220V AC

Model: TLPA2G6G-56-56-BC

TLPA2G6G-56-56-BC is a solid state high power amplifier systems provides high output power and high gain across the 2 to 6 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Frequency range: 2-6GHz
- Gain: 56dB Min
- Psat Output Power: 56dBm Min
- Protection: Over TEM, over voltage, over current ,over VSWR protection
- 50 Ohm Matched Input / Output

Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	2-6			GHz
Power Gain	GP	56			dB
Gain flatness	Δ GL		± 3		dB
Gain adjust Range	Δ GR	30			dB
Output Psat	Psat	56			dBm
Output P1dB	P1dB		53		dBm
Spurious	Spur			-60	dBc
Harmonics	HAM		-15		dBc
Input VSWR	VSWRin		1.5	2.0	:1
AC Voltage	Vac		220		V AC
AC Supply Current	Iac		16		A
Impedance	I/O-IMP	50			Ohms

Mechanical Specifications:




Parameter	Value	Units
Input /Output Connector	N Female/L29 Female	
Monitor and control interface	RS422 or Ethernet	
Size	12U	mm
Weight	≤150	Kg

Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBM)	Class 0, passed 150V

Outline Drawing:

Unit:mm

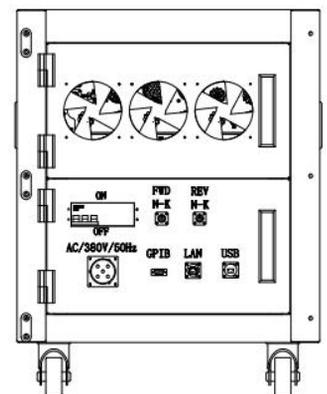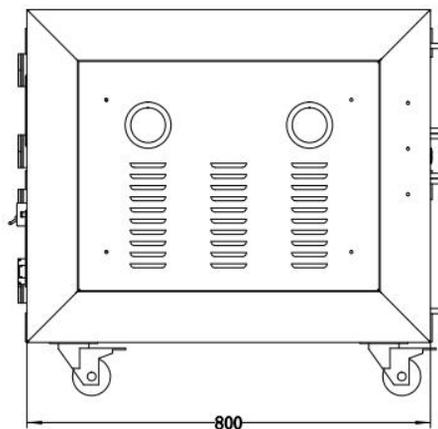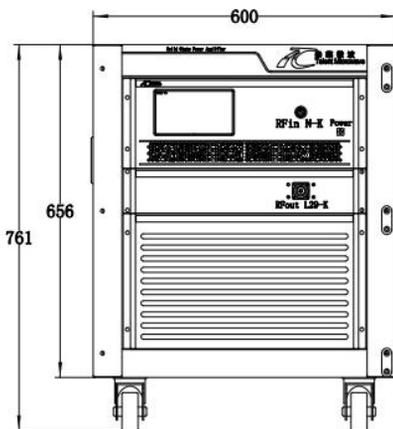

Key Features:

Parameter	Advantages
Control functions	1, Power setting On/Off 2, ALC automatic level control
Protection functions	1, Over TEM 2, Over voltage 3, Over current 4, Over VSWR
Remote control	RS422/Ethernet
Cooling system	Built in Cooling system, forced air cooling

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave, 3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA2G6G-56-56-BC	Solid State High Power Amplifier Systems 2-6GHz, Gain:56dB, Psat:56dBm, 220V AC, Built in Fan Cooling	Rev.1.1