

Low Noise Amplifier

6-18GHz/2.0dB NF/28dB Gain/17dBm P1dB

Model: TLLA6G18G-28-20

TLLA6G18G-28-20 is a low noise amplifier with a typical small signal gain of 28 dB and a maximum noise figure of 2.0 dB across the frequency range of 6 to 18 GHz. The DC power requirement for the amplifier is +12 V DC/150 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 6-18GHz
- Gain: 28dB Typ
- Noise Figure: 2.0dB Max
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

| 参数 Parameter | Min | Typ | Max | 单位 Units |
|-------------------------|-----|------|-----|----------|
| 频率范围 Frequency range | 6 | | 18 | GHz |
| 小信号增益 Small Signal Gain | | 28 | | dB |
| 增益平坦度 Gain Flatness | | ±2.0 | | dB |
| 噪声系数 Noise Figure | | | 2.0 | dB |
| 线性输出功率 Output P1dB | | 17 | | dBm |
| 输入驻波 Input VSWR | | 2.0 | 2.2 | :1 |
| 输出驻波 Output VSWR | | 2.0 | 2.2 | :1 |
| 直流电压 DC Voltage | +8 | +12 | +15 | V DC |
| 直流电流 DC Supply Current | | 150 | | mA |
| 阻抗 Impedance | | 50 | | Ohms |

机械特性 Mechanical Specifications:

| 参数 Parameter | 指标 Value | 单位 Units |
|---------------------------------|-----------------------|----------|
| 输入/输出接口 Input /Output Connector | SMA Female/SMA Female | |
| 直流偏置 DC Bias | Solder Pin | |
| 尺寸 Size | 44.8*29.2*11 | mm |
| 重量 Weight | 55 | g |


绝对最大值 Absolute Maximum Ratings:

| 参数 Parameter | 指标 Value |
|------------------------------|----------------------|
| 供电偏置电压 Supply Bias Voltage | +15V |
| 输入功率 RF Input Power | +15 dBm |
| ESD灵敏度 ESD sensitivity (HBm) | Class 0, passed 150V |



外形图 Outline Drawing:

Unit:mm

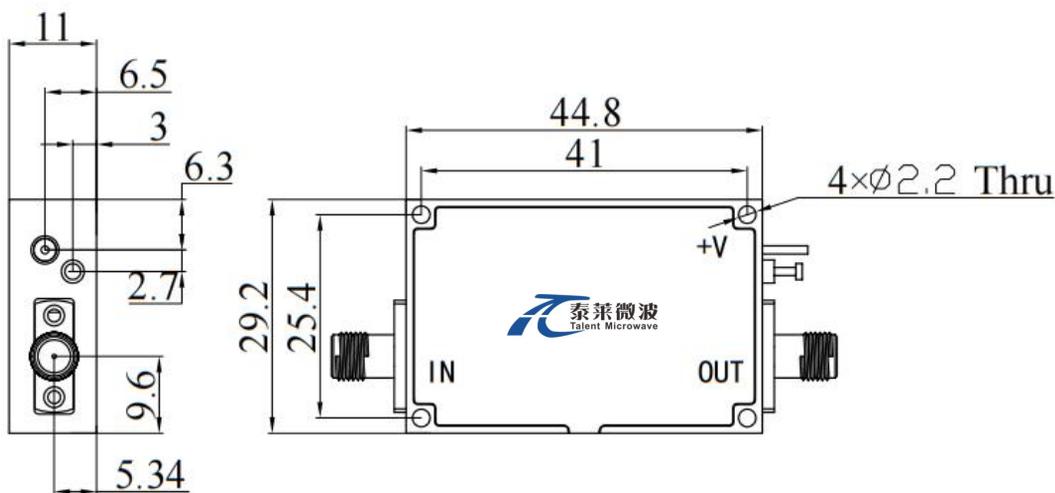

***Heat Sink Required During Operation



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

| 参数 Parameter | Min | Typ | Max | 单位 Units |
|------------------------------------|---|-----|------|----------|
| 操作温度 Operating Temperature | -45 | | +85 | °C |
| 存储温度 Non-operating Temperature | -55 | | +125 | °C |
| 相对湿度 Relative humidity | | 95 | | % |
| 海拔 Altitude | 50,000 | | | feet |
| 震动 Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis | | | |
| 冲击 Shock(non operating) | 20G for 11msc half sin wave,3 axis both directions | | | |

订货信息 Ordering Information:

| 标准型号 Base Number | 描述 Description | 版本号 Revision |
|--------------------|---|--------------|
| TLLA6G18G-28-20 | Low Noise Amplifier, 6-18GHz, Noise Figure:2.0dB, Gain:28dB,P1dB:17dBm,+12V DC,Without Heatsink | Rev.1.1 |
| TLLA6G18G-28-20-HS | Low Noise Amplifier, 6-18GHz, Noise Figure:2.0dB, Gain:28dB,P1dB:17dBm,+12V DC,With Heatsink | Rev.1.1 |