

## Power Limiter

### DC-40GHz/2W, Power Handling

**Model: TLMTDC40G-33-29**

The TLMTDC40G-33-29 is a broadband limiter product. This limiter has an operating frequency range that can cover DC-40 GHz and features stable performance. It boasts a relatively high level of electrostatic discharge (ESD) protection capability.

#### Features:

- Frequency range:DC-40 GHz
- RF Power Handling:2W(CW)
- Limiting power:29 dBm
- Low Insertion Loss
- High level ESD protection
- 50 Ohm Matched Input / Output

#### Applications:

- Communication receiver
- Laboratory test
- Sensor radar

#### Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	DC-40			GHz
Insertion Loss		1		dB
Limiting power		29		dBm
Input Return Loss		-18		dB
Output Return Loss		-18		dB
Power handling	2W(CW)			
Impedance	50			Ohms

#### Mechanical Specifications:



Parameter	Value	Units
Input /Output Connector	2.92mm Male/2.92mm Female	
Length	42.2	mm

### Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+33 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

### Outline Drawing:

Unit:mm

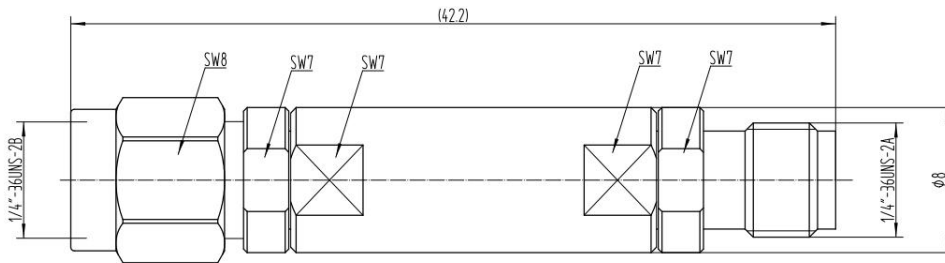

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

### Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

### Ordering Information:


Base Number	Description	Revision
TLMTDC40G-33-29	Power Limiter, DC-40GHz, Limiting power:29 dBm, High level ESD protection.	Rev.1.1

**Typical Performance Data:**


**Insertion Loss vs Frequency**

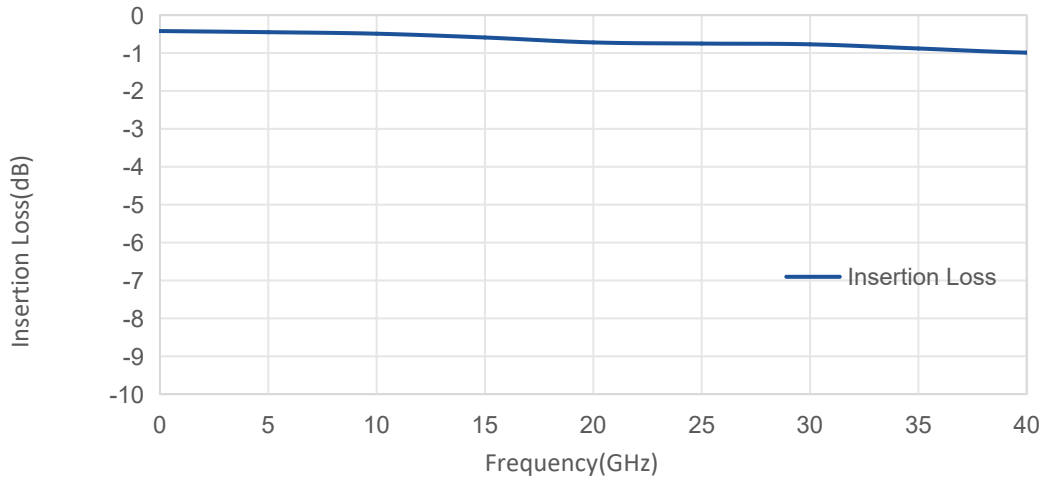

**Return Loss vs Frequency**

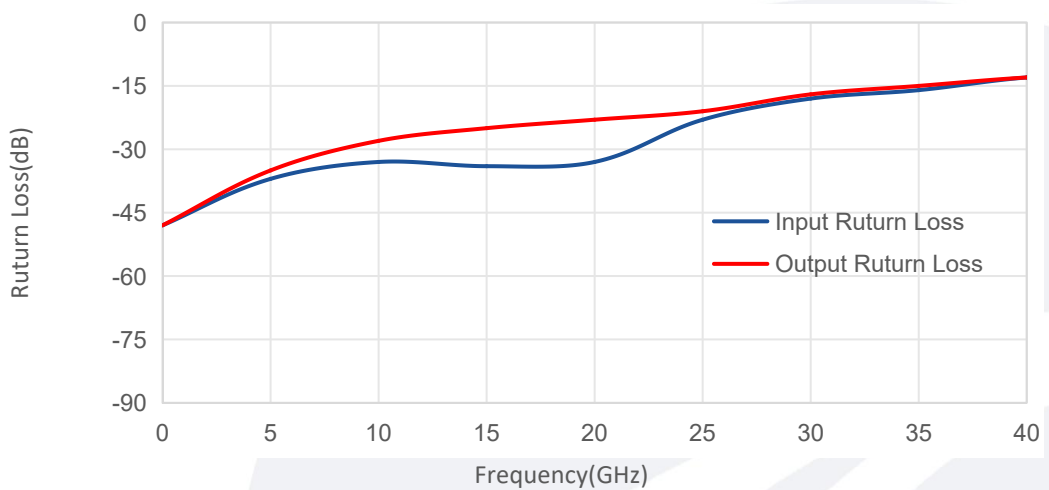

**Pout vs Pin**

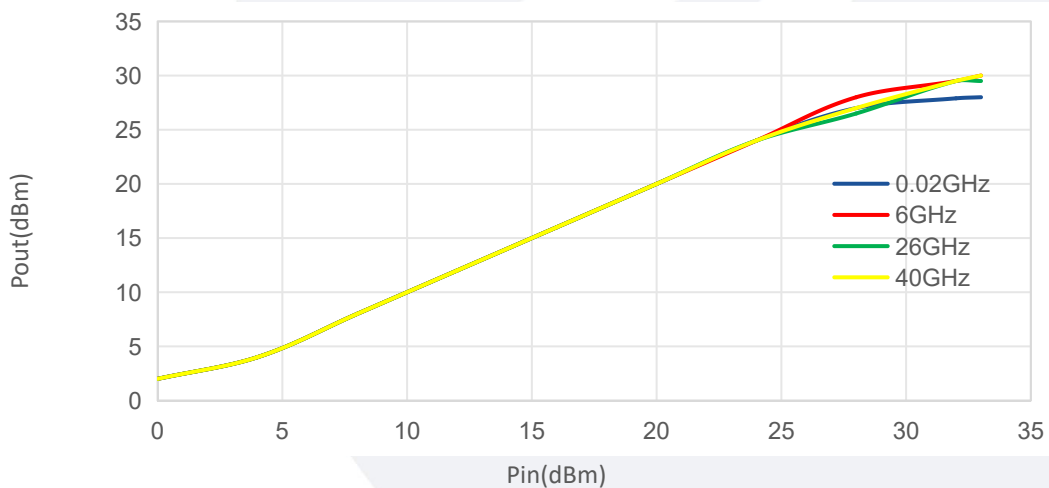

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.