

Power Amplifier

50-350MHz/33dB Gain/33dBm Psat

Model: TLP50M350M-33-33

TLP50M350M-33-33 is a power amplifier with a minimum small signal gain of 33 dB and a minimum Psat of 33 dBm across the frequency range of 50 to 350 MHz. The DC power requirement for the amplifier is +12 VDC/1000 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 50-350MHz
- Gain: 33dB Min
- Output Power Psat: 33dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	50		350	MHz
小信号增益 Small Signal Gain	33	35		dB
增益平坦度 Gain Flatness		±1	±2	dB
饱和输出功率 Output Psat	33	34		dBm
输入驻波 Input VSWR			1.5	:1
直流电压 DC Voltage		+12		V DC
直流电流 DC Supply Current		1000		mA
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	76*48*15	mm
重量 Weight	200	g


绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	0 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



外形图 Outline Drawing:

Unit:mm

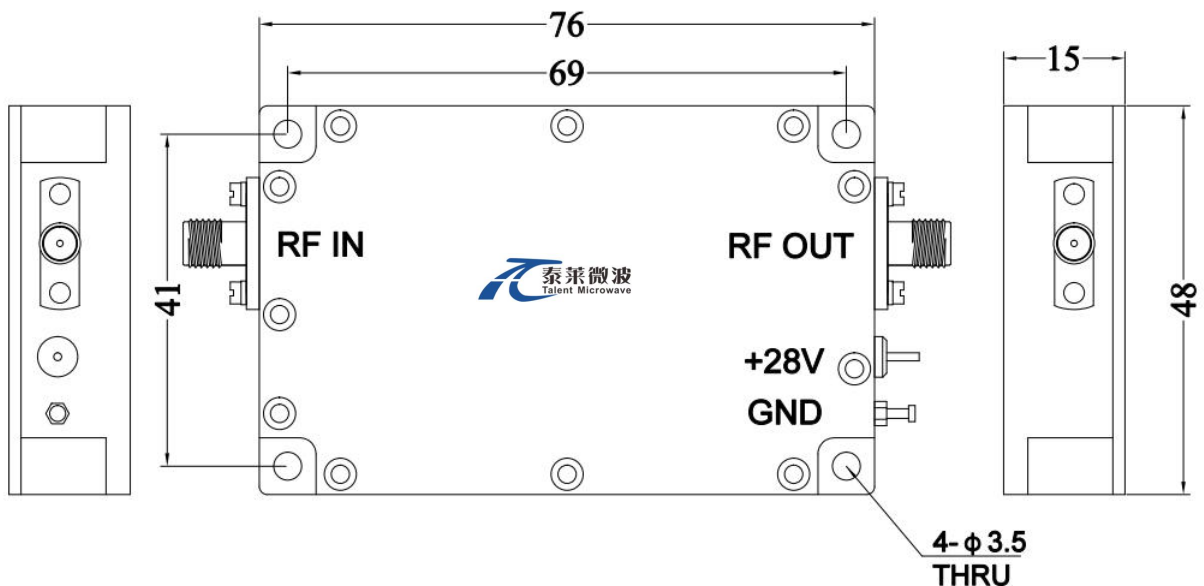

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-45		+85	°C
存储温度 Non-operating Temperature*	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA50M350M-33-33	Power amplifier 50-350MHz, Gain:33dB, Psat:33dBm, +12V DC, Without Heatsink.	Rev.1.2
TLPA50M350M-33-33-HS	Power amplifier 50-350MHz, Gain:33dB, Psat:33dBm, +12V DC, With Heatsink.	Rev.1.2

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

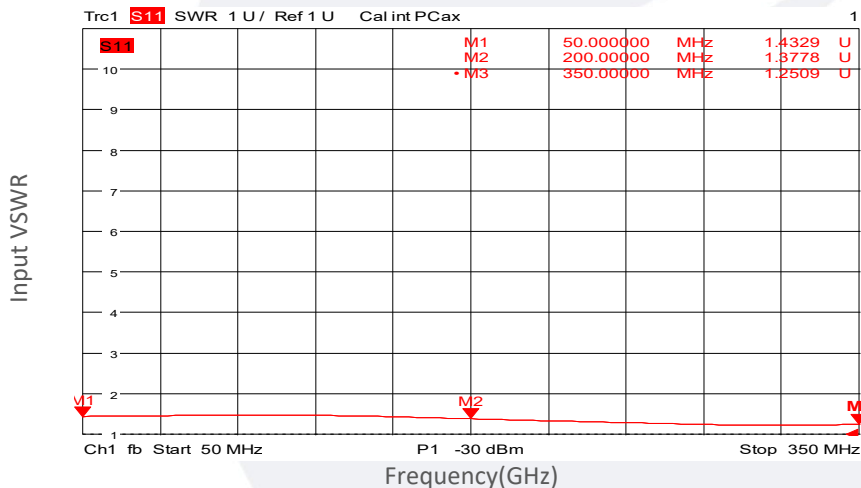


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Small Signal Gain vs Frequency

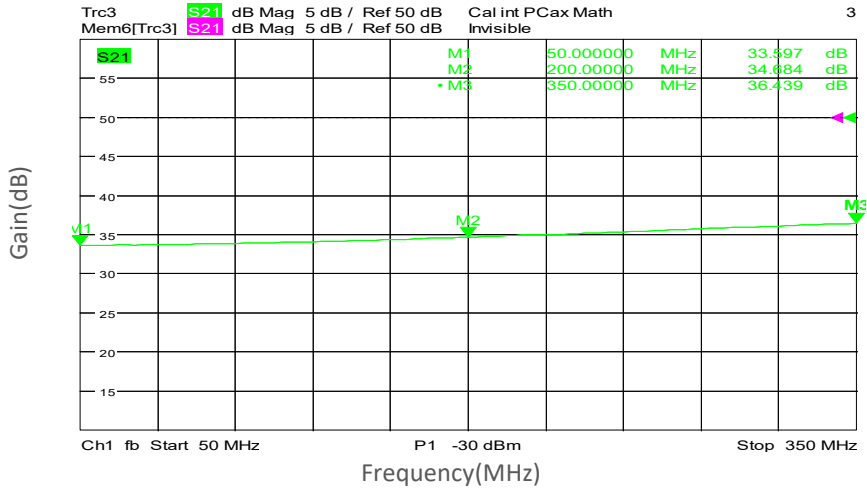

Gain vs Output Power

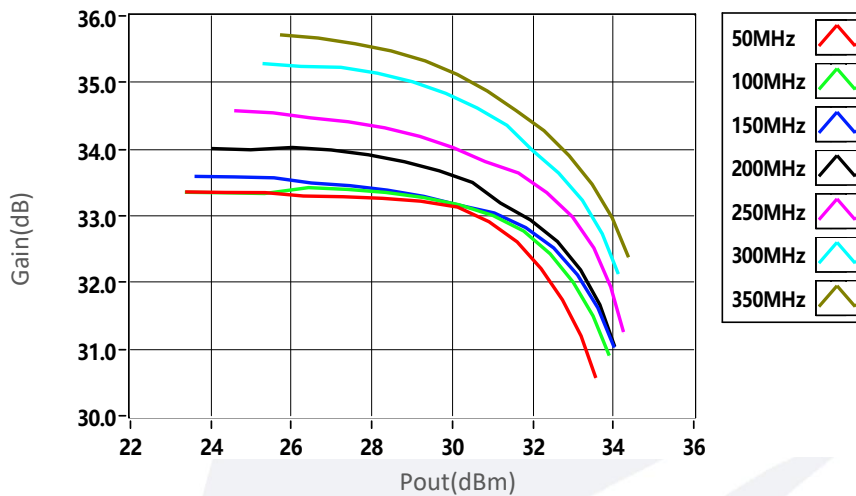


PndB vs Frequency

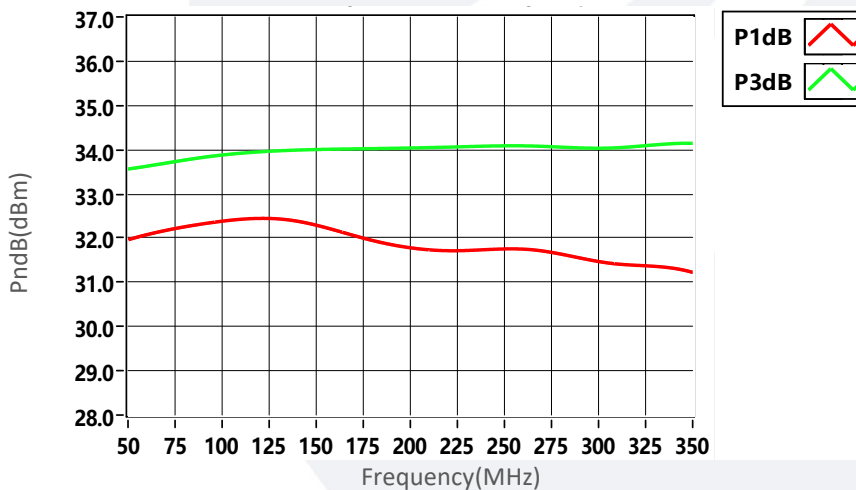


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Psat vs Frequency

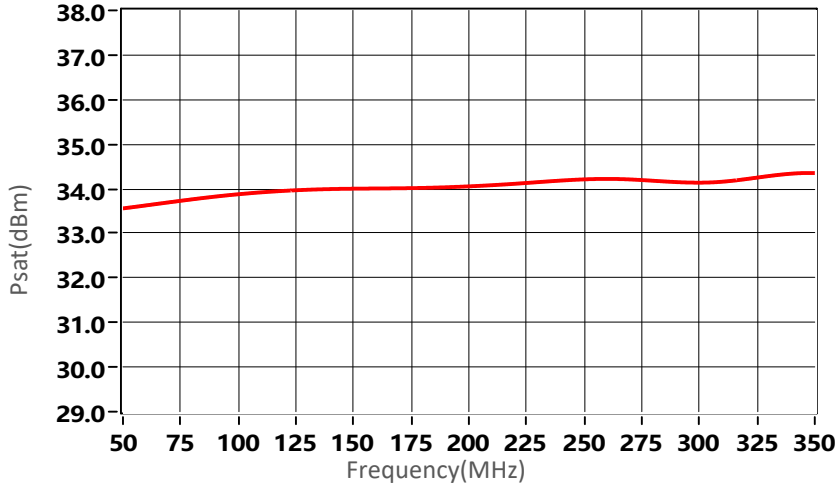

2nd Harmonics vs Output Power

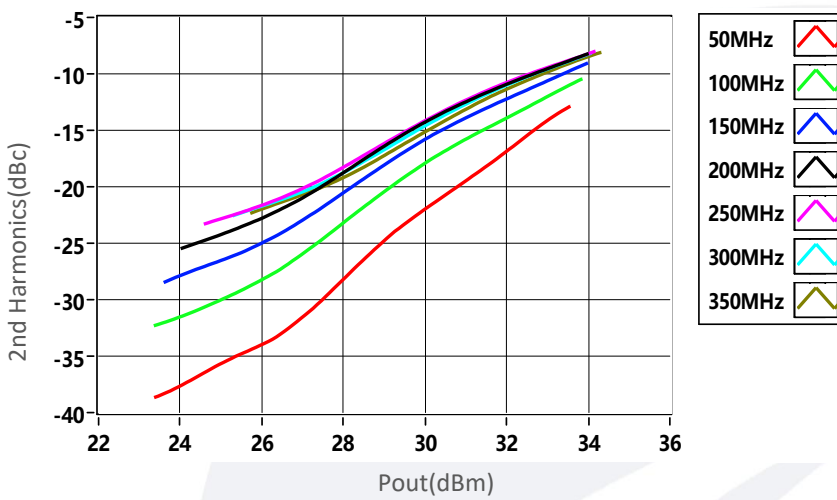

3rd Harmonics vs Output Power

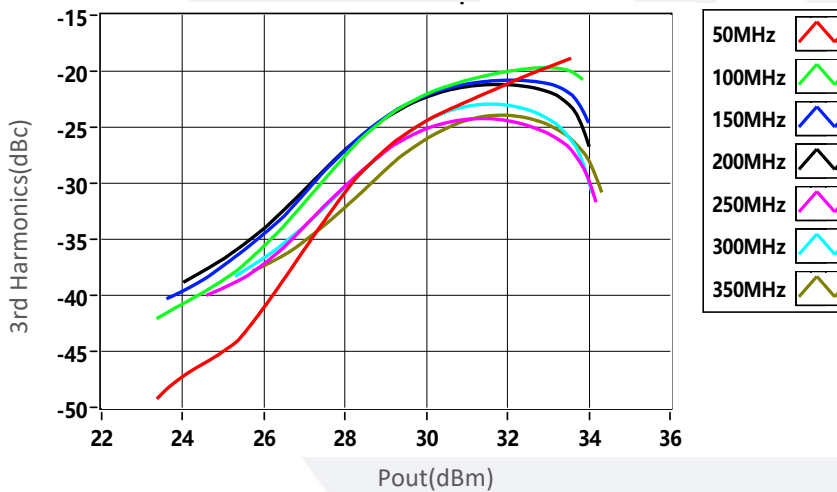

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.