

## Power Amplifier

1-6GHz/52dB Gain/50dBm Psat

Model: TLPA1G6G-52-50

TLPA1G6G-52-50 is a power amplifier with a typical small signal gain of 52 dB and a minimum Psat of 50 dBm across the frequency range of 1 to 6 GHz. The DC power requirement for the amplifier is +28 VDC/22 A. The input port configuration offers coax adapter structure with SMA female and output port configuration offers coax adapter structure with N female.

### Features:

- Frequency range: 1-6 GHz
- Gain: 52dB Typ
- Output Power Psat: 50dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	1		6	GHz
小信号增益 Small Signal Gain	50	52		dB
增益平坦度 Gain Flatness		±3	±5	dB
饱和输出功率 Output Psat	50	51		dBm
谐波 Harmonic		-12		dBc
输入驻波 Input VSWR		1.5	2	:1
直流电压 DC Voltage	+26	+28	+30	V DC
直流电流 DC Supply Current		3	22	A
阻抗 Impedance		50		Ohms

## 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/N Female	
直流供电接口 DC Supply Connector	DSUB-15 Female	

### 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
尺寸 Size	270*160*27	mm
重量 Weight	2400	g


### 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+30 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



### 外形图 Outline Drawing:

Unit:mm

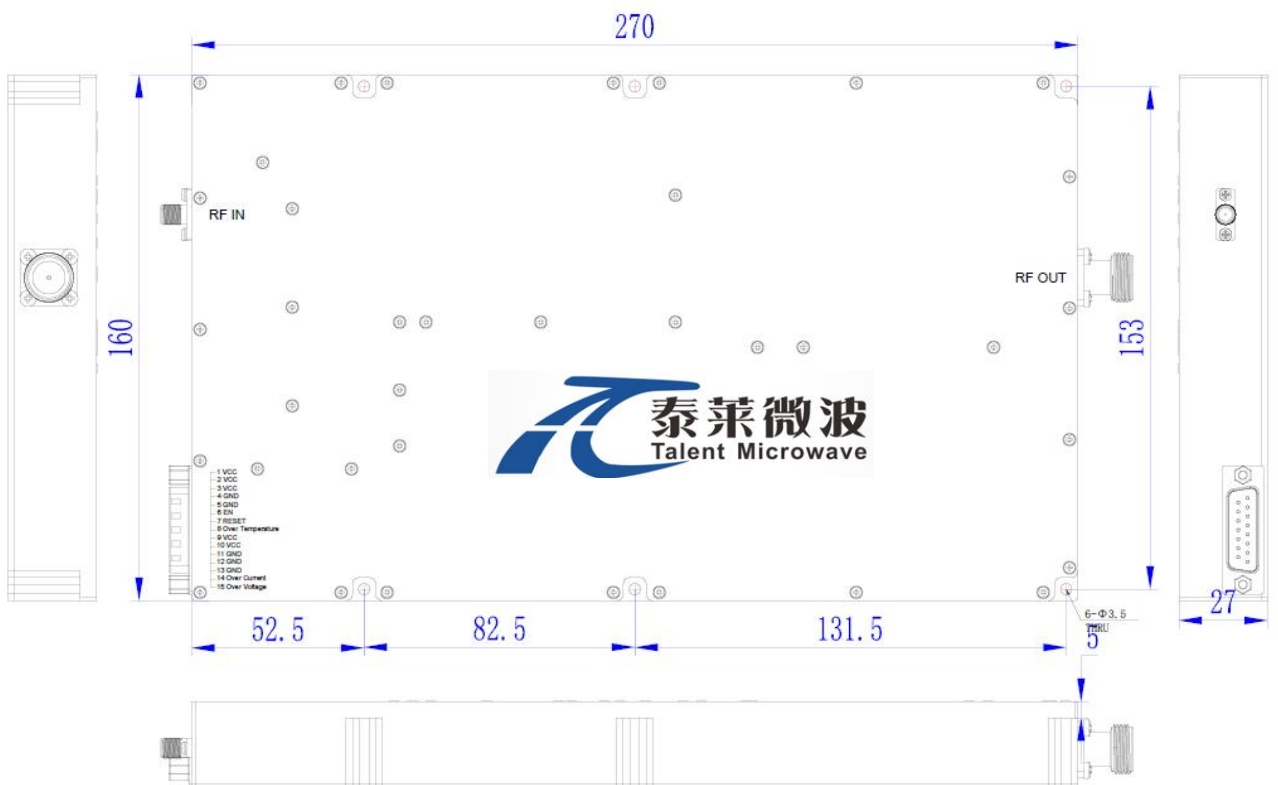

**\*\*\*Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## 直流供电接口 DC Supply Connector (DSUB-15 Female):

引脚 Pin	名称 Name	功能 Function
1	VCC	+26.0-30.0VDC
2	VCC	+26.0-30.0VDC
3	VCC	+26.0-30.0VDC
4	GND	Ground
5	GND	Ground
6	EN	Amplifier Enable: TTL High (5V) (Internally Pulled-High)
7	RESET	Resets PA when logic LOW is applied and released (Internally Pulled-High)
8	Over Temperature	When the temperature of the case exceeds 85 °C, the power amplifier will turn off and this pin will be pulled high. If the temperature of case drops to 70 °C, the power amplifier will return to normal operation, and this pin will be pulled low.
9	VCC	+26.0-30.0VDC
10	VCC	+26.0-30.0VDC
11	GND	Ground
12	GND	Ground
13	GND	Ground
14	Over Current	Current FAULT:(TTL High= Fault, TTL Low =Normal)
15	Over Voltage	Voltage FAULT:(TTL High= Fault, TTL Low =Normal)

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+50	°C
存储温度 Non-operating Temperature*	-30		+60	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


\*Note: For a wider temperature range, please consult the manufacturer.

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA1G6G-52-50	Power amplifier 1-6GHz, Gain:52dB,Psat:50dBm,+28V DC,Without Heatsink	Rev.1.1
TLPA1G6G-52-50-HS	Power amplifier 1-6GHz, Gain:52dB,Psat:50dBm,+28V DC,With Heatsink	Rev.1.1

## 典型曲线 Typical Performance Data:


### Input VSWR vs Frequency

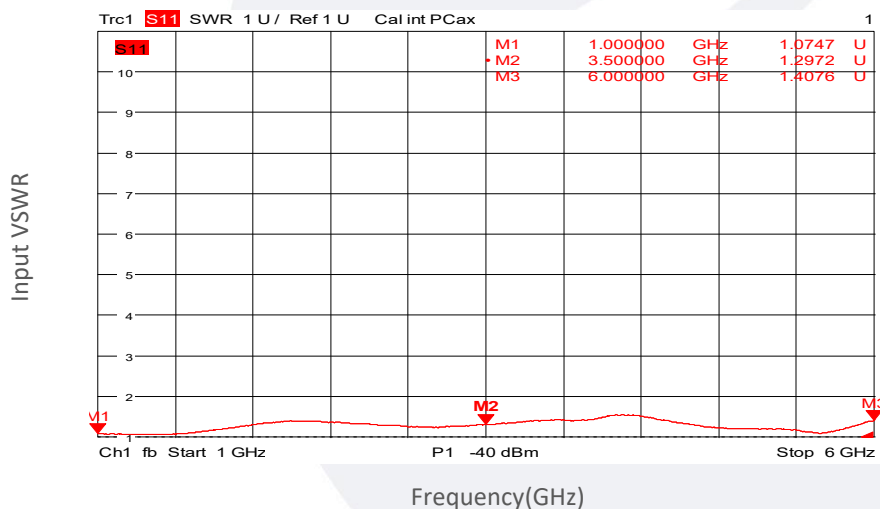


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## 典型曲线 Typical Performance Data:


### Small Signal Gain vs Frequency

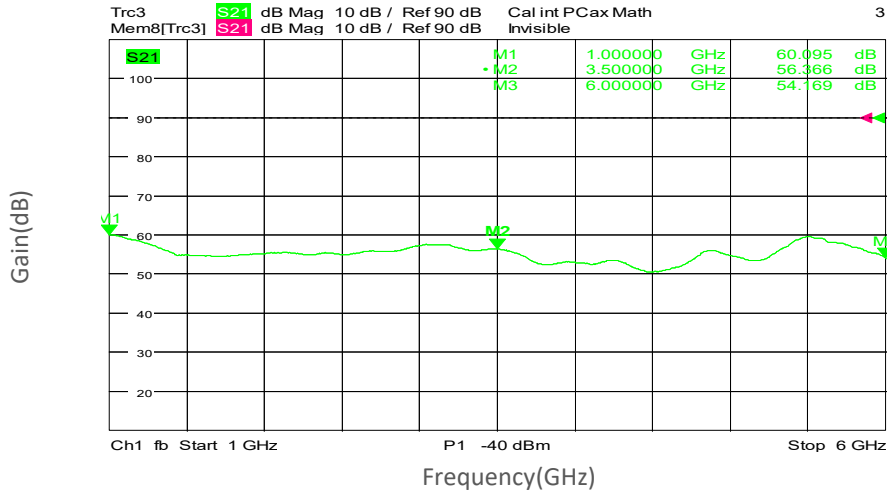

### Gain vs Output Power

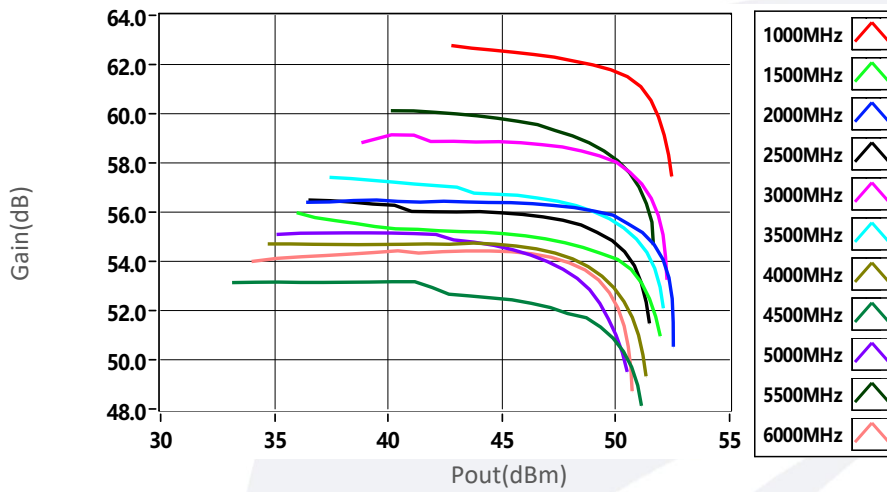


### P1dB vs Frequency

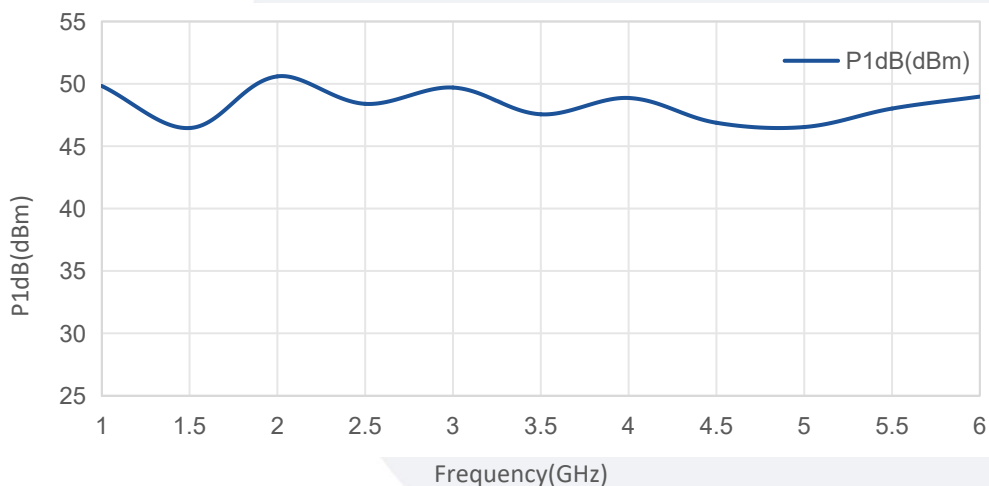


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## 典型曲线 Typical Performance Data:

### Psat vs Frequency

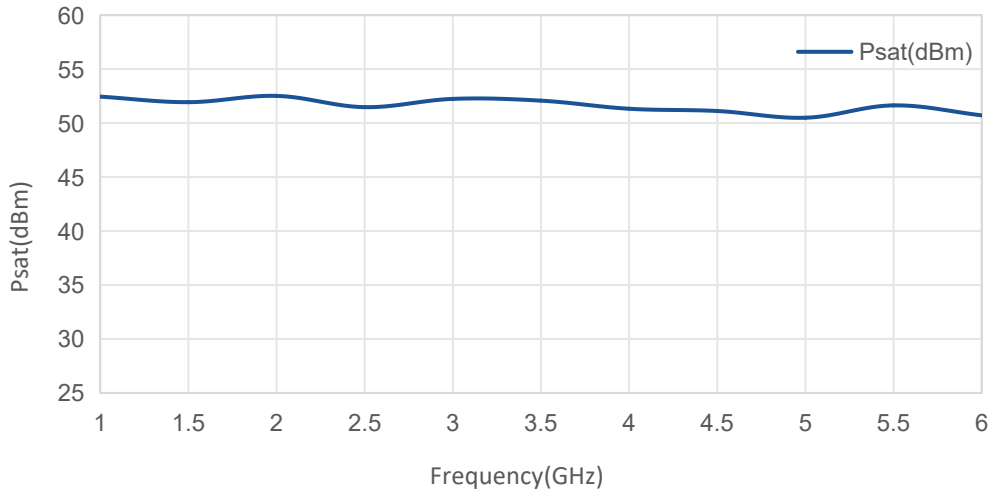

### Harmonic vs Frequency

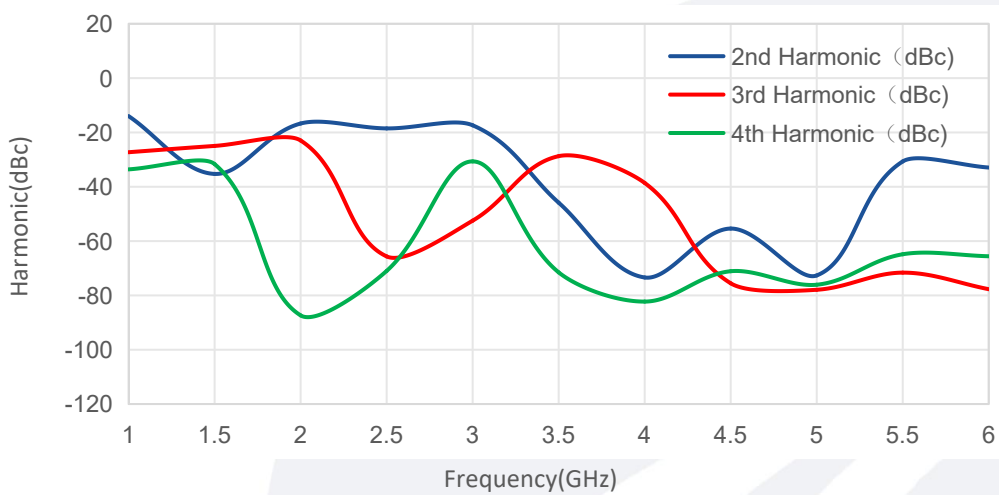

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.