

## Solid State High Power Amplifier Systems

1-40GHz/40dB Gain/40dBm Psat/220V AC

Model: TLPA1G40G-40-40-BC-2

TLPA1G40G-40-40-BC-2 is a solid state high power amplifier systems provides high output power and high gain across the 1 to 40 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

### Features:

- Frequency range: 1-40GHz
- Gain: 40dB Min
- Psat Output Power: 40dBm Min
- Protection: Over TEM, over voltage, over current, over VSWR protection
- 50 Ohm Matched Input / Output



### Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	Band A: 1-18 Band B: 18-40			GHz
Power Gain	GP	40			dB
Gain flatness	@Band A	ΔGL	±5		dB
	@Band B		±5		
Output Psat	Psat	40			dBm
Spurious@Pout=40dBm	Spur			-60	dBc
Harmonics	@Band A	HAM			dBc
	@Band B				
Input VSWR	@Band A	VSWRin			:1
	@Band B				
AC Voltage	Vac		220		V AC
Power Consumption	@Band A	Pdiss			W
	@Band B				
Impedance	I/O-IMP	50			Ohms

## Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	2.92mm Female/2.92mm Female	
Front Panel LCD Screen Display	7 inch LCD Screen Display	
Size	19 Inch 4U*540	mm
Weight	≤30	Kg

## Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBM)	Class 0, passed 150V

## Outline Drawing:

Unit:mm

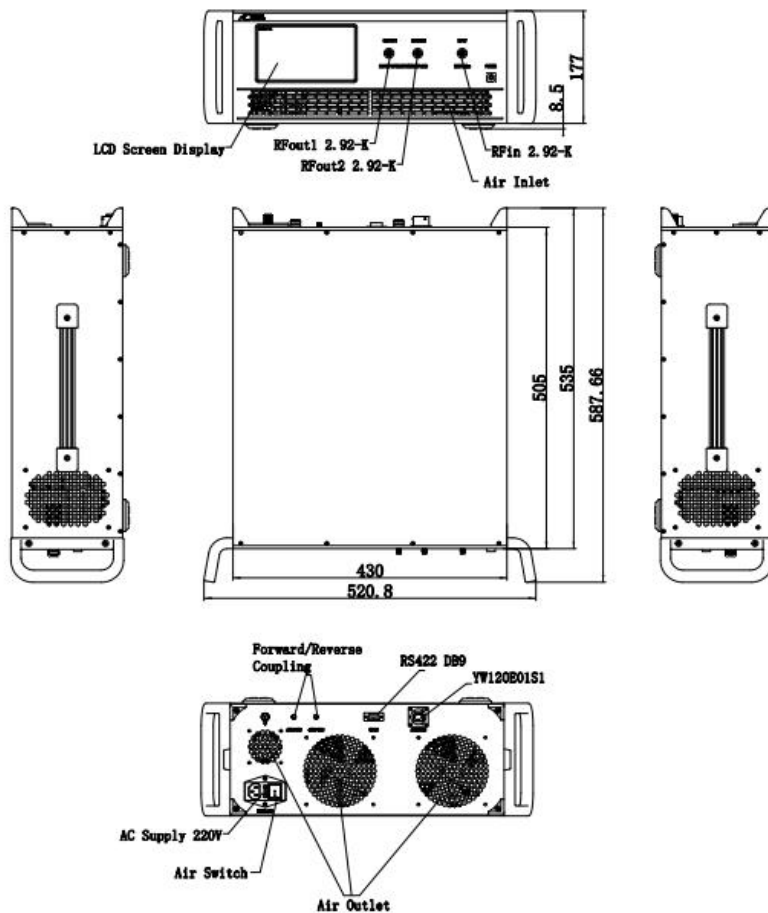

### Key Features:

Parameter	特点 Advantages
Control functions	1, Power setting On/Off 2, ALC automatic level control 3, Frequency Band Switching
Protection functions	1, Over TEM 2, Over voltage 3, Over current protection 4, Over VSWR
Remote control	RS422/Ethernet
Cooling system	Built in Cooling system, forced air cooling

### Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+50	°C
Non-operating Temperature*	-30		+60	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave, 3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

### Ordering Information:

Base Number	Description	Revision
TLPA1G40G-40-40-BC-2	Solid State High Power Amplifier Systems 1-40GHz, Gain:40dB, Psat:40 dBm, 220V AC, Built in Fan Cooling	Rev.1.1