

Power Amplifier

WR-10/95-105GHz/30dB Gain/13dBm Psat

Model: TMPA-095105-3012-10

TMPA-095105-3012-10 is a power amplifier with a typical small signal gain of 30 dB and a nominal Psat of 13 dBm across the frequency range of 95 to 105 GHz. The DC power requirement for the amplifier is +5VDC/180 mA. The input and output port configuration offers an inline structure with WR-10 waveguides and UG-387/U-M anticocking flanges.

Features:

- Frequency range: 95-105GHz
- Gain: 30dB Typ
- Output Power Psat: 13dBm Typ
- Good Power and Gain Flatness

Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	95		105	GHz
Small Signal Gain		30		dB
Output Psat	12	13	15	dBm
Input VSWR		2.2		:1
Output VSWR		2.2		:1
DC Voltage		5		V DC
DC Supply Current		180		mA

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	WR-10/UG-387/U	
DC Bias	Solder Pin	
Size	45*42*24	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	TBD
RF Input Power	TBD
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

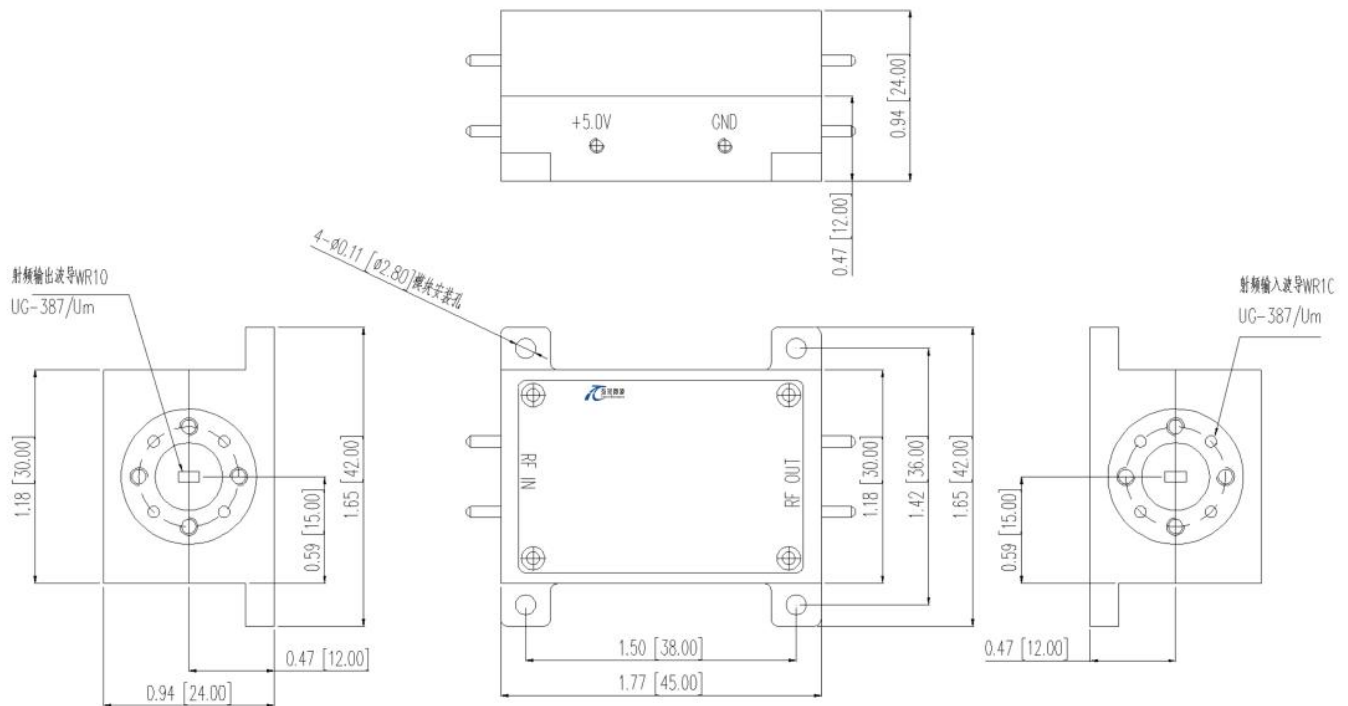

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMPA-095105-3012-10	Power Amplifier, 95-105GHz, Gain: 30dB Type, Psat: 13dBm Type, +5V DC,WR-10, Without heasink	Rev.1.1
TMPA-095105-3012-10-HS	Power Amplifier, 95-105GHz, Gain: 30dB Type, Psat: 13dBm Type, +5V DC,WR-10, With heatsink	Rev.1.1